


REV.	DESCRIPTION	DATE	BY

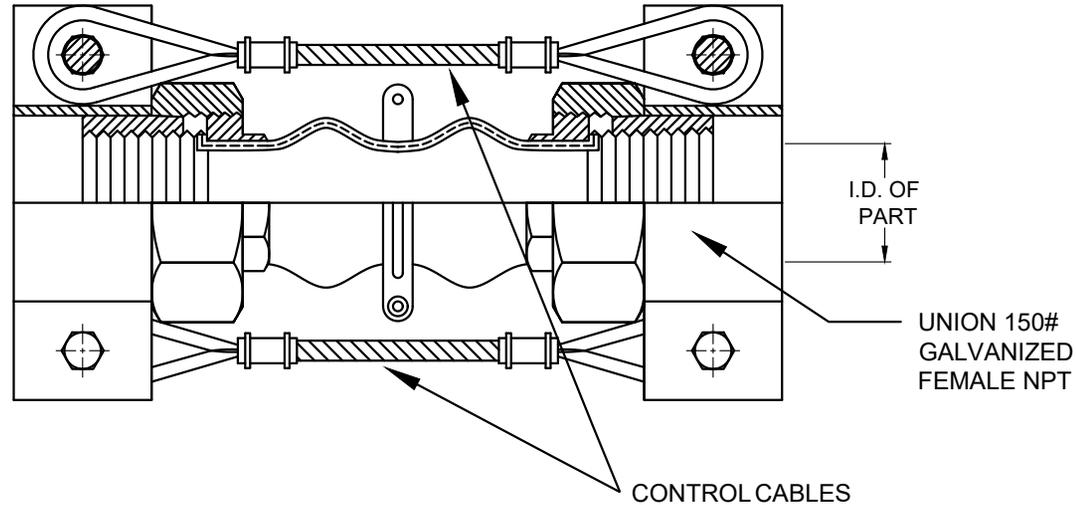

JOINT SIZE I.D. (in.)	FACE TO FACE (in.)	PRESSURE (PSI) VS. TEMPERATURE  170°F	MOVEMENT CAPABILITY				GROSS WT. (in. sq.)	PART NUMBERS  EPDM
			COMPRESSION (in.)	ELONGATION (in.)	LATERAL (in.)	ANGULAR (DEGREES)		
3/4	8	225	7/8	1/4	7/8	32	2	2655-E-3/4X8
1	8	225	7/8	1/4	7/8	25	3	2655-E-1X8
1 1/4	8	225	7/8	1/4	7/8	21	4	2655-E-1-1/4X8
1 1/2	8	225	7/8	1/4	7/8	17	5	2655-E-1-1/2X8
2	8	225	7/8	1/4	7/8	13	6	2655-E-2X8
2 1/2	8	225	7/8	1/4	7/8	11	10	2655-E-2-1/2X8

**NOTES:**

1. ALL DIMENSIONS IN INCHES.
2. PRESSURE: OPERATING - 150 PSI, VACUUM-26 HG.
3. PRESSURE RATING BASED ON 170 °F OPERATING TEMPERATURE.
4. MAXIMUM OPERATING TEMPERATURE 250 °F.
5. EPDM TUBE AND COVER WITH POLY REINFORCEMENT.
6. PIPING MUST BE ANCHORED. PART MUST BE INSTALLED AT 8" NEUTRAL LENGTH.

WARNING: EXPANSION JOINTS MAY OPERATE IN PIPELINES OR EQUIPMENT CARRYING FLUIDS AND/OR GASES AT ELEVATED TEMPERATURES AND PRESSURES. NORMAL PRECAUTIONS SHOULD BE TAKEN TO MAKE SURE THESE PARTS ARE INSTALLED CORRECTLY AND INSPECTED REGULARLY. PRECAUTIONS SHOULD BE TAKEN TO PROTECT PERSONNEL IN THE EVENT OF A LEAKAGE OR SPLASH.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL 2655 RUBBER EXPANSION JOINT DOUBLE SPHERE WITH CONTROL CABLES (EPDM)**



**VMC GROUP**  
 THE POWER OF TOGETHER

Bloomingtondale, NJ 07403  
 Houston, TX 77041

SCALE:

NONE

SHEET:

1 OF 1

DRAWING NO.:

REVISION

