REV.:5 11/07/23 167R-103370 DESCRIPTION REV. DATE -(6" THRU 96")-RATED LOAD **HEIGHT** LENGTH **WIDTH** APP. WT. COLOR MODEL NUMBER (LBS.) (IN.) (IN.) (LBS.) CODE (IN.) QFFG 222-400 400 2.0 2.0 2.0 0.12 **BLACK** (2'2)**THRU** 48" -MIN. 1/2 PLY WOOD SHEET (44) -1-1/2" FIBERGLASS SOUND MATTING (WIDTH) 4 x 8 PANEL LAYOUT SHOWN (HEIGHT) NOTE: 1. 4' X 8' IS STANDARD PANEL SIZE. 2. PANEL SIZE VARIES BASED ON CUSTOMERS REQUIREMENTS. SECTION A-A 3. DIMENSIONS MAY VARY ON CUSTOMERS REQUIREMENTS. SUB-FLOOR 4. ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14. (B.O.) (B.O.)= BY OTHER, NOT VMC OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



JOB NAME: CUSTOMER: CUSTOMER P.O.: SALES ORDER:

**CERTIFIED FOR: CERT** 

MODEL QFFG 400-900 LBS. ISOLATED FLOATING FLOOR WITH FIBERGLASS BLOCK



NONE SHEET: 1 OF 2

THE POWER OF TOGETHER" Houston, TX 77041

Bloomingdale, NJ 07403

167R-103370 REV.:5 11/07/23 REV.: DESCRIPTION DATE BY


## **INSTRUCTIONS:**

- 1. SUB FLOOR TO BE LEVEL, SMOOTH & CLEAR OF CLEAR DEBRIS(B.O.)
- 2. INSTALL PERIMETER ISOLATION AROUND THE AREA THE PANEL WILL BE PLACED (B.O.)
- 3. PLACE QFFN PANEL SNUGLY AGAINST EACH OTHER PER LAYOUT.
- 4. INSTALL WATER PROOFING AND OVERLAP 1' (B.O.)
- 5. INSTALL REBAR IF NEEDED AS PART OF PROJECT REQUIREMENT.(B.O)
- 6. POUR CONCRETE ON TO ALL PANELS. (B.O)
- 7. INSTALL MASTIC SEAL ON TOP OF THE PERIMETER BOARDS.(B.0)
- 8. FINISHED: UNLESS FINISH FLOOR IS REQUIRED.
- SLAB DESIGN & CONSTRUCTION IS BY OTHERS NOT VMC

NOTE:

B.O. = BY OTHERS NOT BY VMC

SALES ORDER:

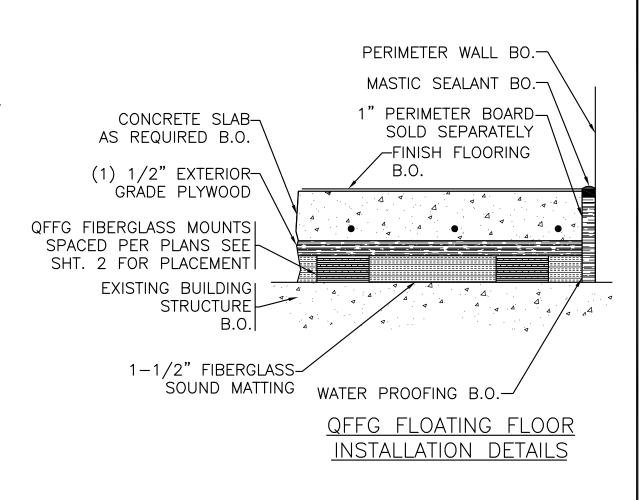

CERTIFIED FOR: CERT

JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O.:

MODEL QFFG 400-900 LBS.
ISOLATED FLOATING FLOOR WITH
FIBERGLASS BLOCK



NONE
SHEET:
2 OF 2

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

'..'. <del>VISCMA</del>

REVISION

THE POWER OF TOGETHER\*
Bloomingdale, NJ 07403
Houston, TX 77041

DRAWING NO.: