


C6 SERIES

3/16" WIRE ROPE

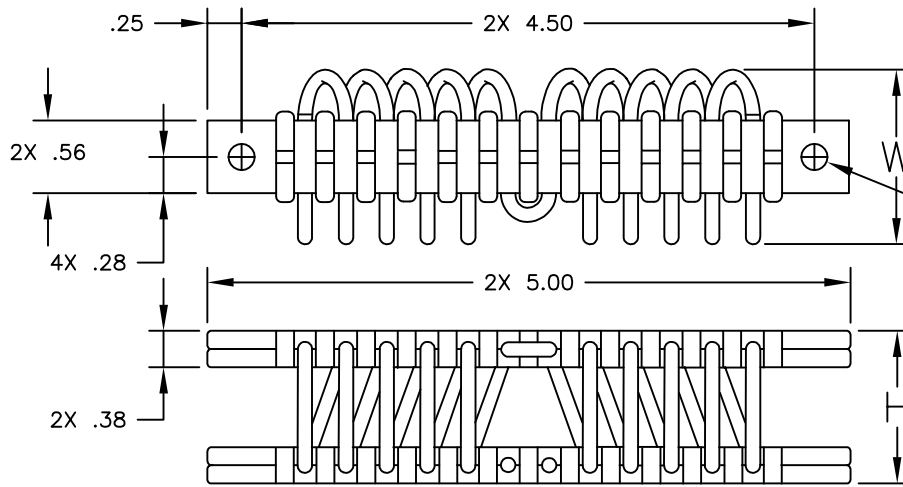

MOUNTING HOLE SUFFIX OPTIONS.

- [] BLANK= ϕ .257 THRU 4PL
- C2= ϕ .257 THRU C'SINK ϕ .52 x 82' 4PL
- I2= #1/4-20 INSERTS 4PL
- CI= #1/4-20 INSERTS 2PL ϕ .257 THRU C'SINK ϕ .52 x 82' 2PL

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H \pm .06	W(REF)				
C6-H-310-[]	1.20	1.40	COMPRESSION SHEAR/ROLL 45 DEG. C/R	2845 1060 1420	5100 1280 3300	.35 .50 .50
C6-H-410-[]	1.30	1.50	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1835 800 815	3340 900 1930	.40 .55 .70
C6-H-510-[]	1.40	1.60	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1510 595 555	2820 620 1440	.45 .60 .90
C6-H-610-[]	1.50	1.70	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1285 425 440	2520 390 1200	.50 .60 1.00
C6-H-710-[]	1.60	1.80	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1015 290 335	1680 270 920	.60 .70 1.20
C6-H-810-[]	1.70	1.90	COMPRESSION SHEAR/ROLL 45 DEG. C/R	790 175 275	1470 230 780	.70 .80 1.30
C6-H-910-[]	1.80	2.00	COMPRESSION SHEAR/ROLL 45 DEG. C/R	480 255 195	1000 210 605	.90 .90 1.60

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL C6 SERIES HELICAL WIRE ROPE ISOLATOR



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION