


REV.	DESCRIPTION	DATE	BY

CA4 SERIES

1/8" WIRE ROPE

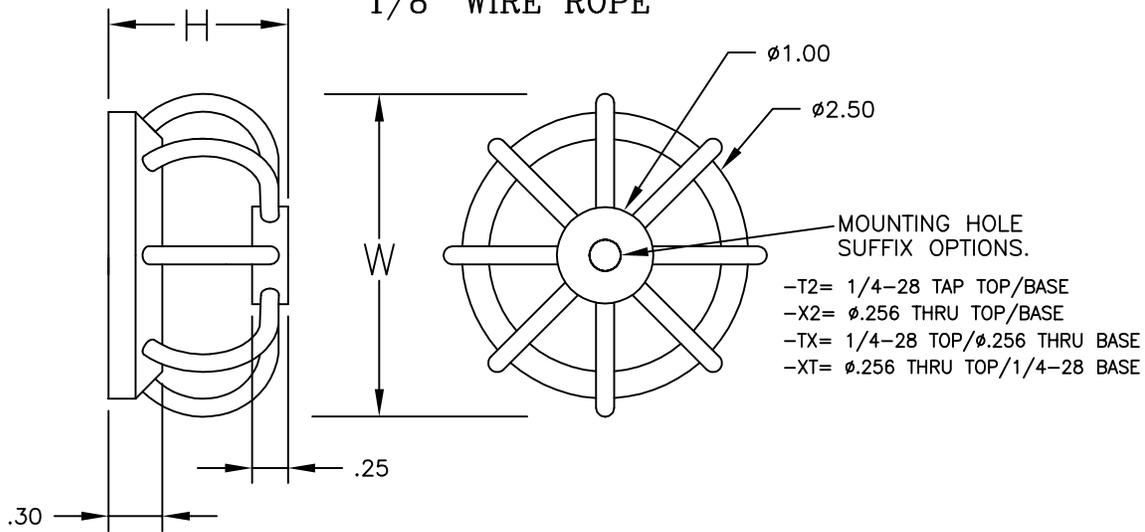

- MOUNTING HOLE SUFFIX OPTIONS.
- T2= 1/4-28 TAP TOP/BASE
 - X2= ϕ .256 THRU TOP/BASE
 - TX= 1/4-28 TOP/ ϕ .256 THRU BASE
 - XT= ϕ .256 THRU TOP/1/4-28 BASE

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H \pm .06	W(REF)				
CA4-200-08-[]	1.25	2.75	COMPRESSION SHEAR 45 DEG. C/R	175 105 80	340 95 175	.30 .30 .50
CA4-250-08-[]	1.70	3.00	COMPRESSION SHEAR 45 DEG. C/R	70 40 30	140 35 85	.45 .50 .80
CA4-300-08-[]	2.00	3.25	COMPRESSION SHEAR 45 DEG. C/R	40 10 15	85 20 50	.60 .75 .72
CAX4-[] (CROSSED CABLE)	1.70	3.25	COMPRESSION SHEAR 45 DEG. C/R	45 45 20	110 35 70	.55 .45 .90

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL CA4 SERIES
 ALUMINUM ARCH WIRE ROPE
 ISOLATOR**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:
NONE
 SHEET:



DRAWING NO.: _____ REVISION