

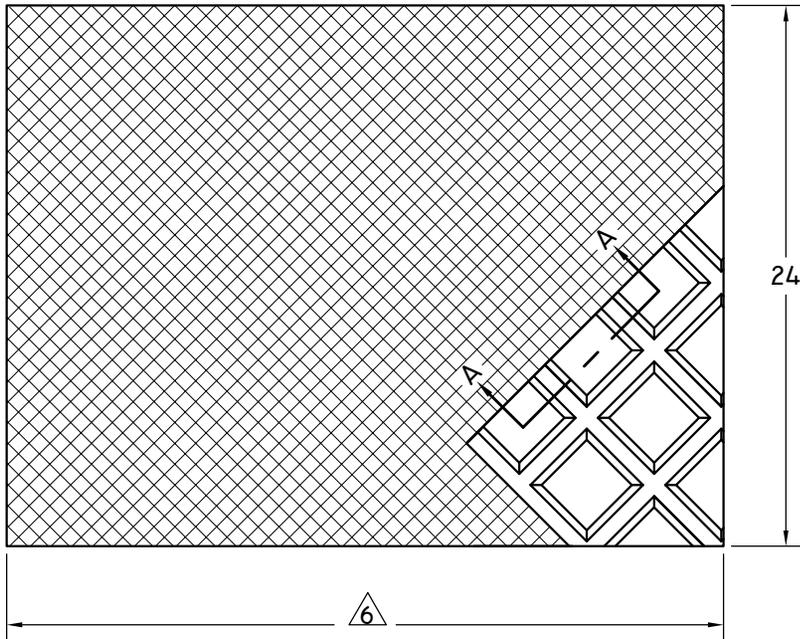


REV.	DESCRIPTION	DATE	BY

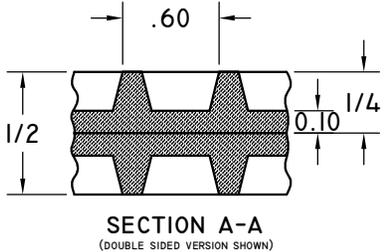

CAPACITY TYPE	THICKNESS	LOAD RANGE (PSI) sq.in	COLOR
Standard Capacity	.25", WAFFLE EMBOSSED	up to 60	BLACK
High Capacity	.25", WAFFLE EMBOSSED	60-120	BLUE

NOTE: Suggested loadings for engines, compressors, fans, etc. is 50 lbs./sq.in. Suggested loadings for punch presses, shears, etc. is 40 lbs./sq.

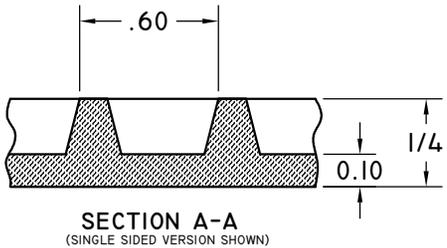

NOTES:

1. AVAILABLE IN VARIOUS COMPOUNDS TO MEET CUSTOMER DEMANDS, CONTACT VMC FOR FURTHER INFORMATION.
2. AVAILABLE IN DOUBLE SIDED SHEETS OR SINGLE SHEET AS ILLUSTRATED.
3. OPERATION AT OR NEAR RATED LOAD CAPACITY IS EXPECTED TO PROVIDE MODERATE ATTENUATION OF EXPECTED MID TO HIGH FREQUENCY MACHINE STRUCTURE-BORNE NOISE WHEN PROPERLY INSTALLED.
4. THIS PRODUCT IS INTENDED TO BE USED AS A COMPRESSIVE RESILIENT PAD WHICH MAY BE CUT AND PUNCHED FOR USE. IT IS SUITABLE TO BE USED UNDER AVERAGE INDUSTRIAL AND COMMERCIAL ENVIRONMENTS. CONSULT VMC FOR SPECIFIC ENVIRONMENT AND LOADING.
5. DIMENSIONS ARE FOR CUSTOMER REFERENCE ONLY.

6. CUSTOM CUT LENGTH AND WIDTH AVAILABLE CONTACT VMC FOR AVAILABILITY MAX SHEET SIZE 24" X36".

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL ELASTO-GRIP 60-120 PSI.
 ELASTOMERIC PAD
 1/4"-1/2" INCH THICK**

VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE
 SHEET: 1 OF 1



DRAWING NO.: _____ REVISION _____