

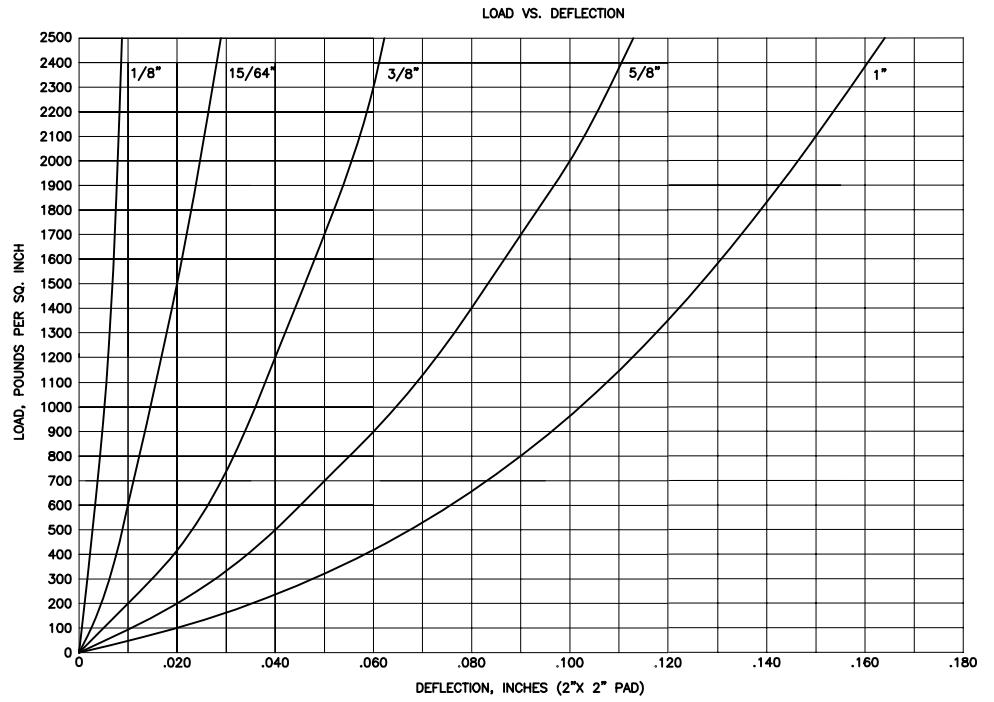
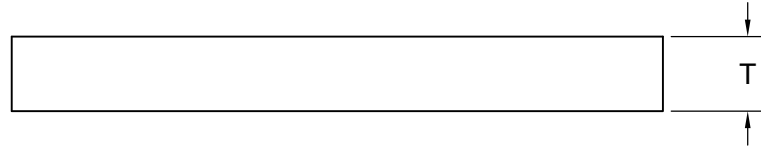


| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |

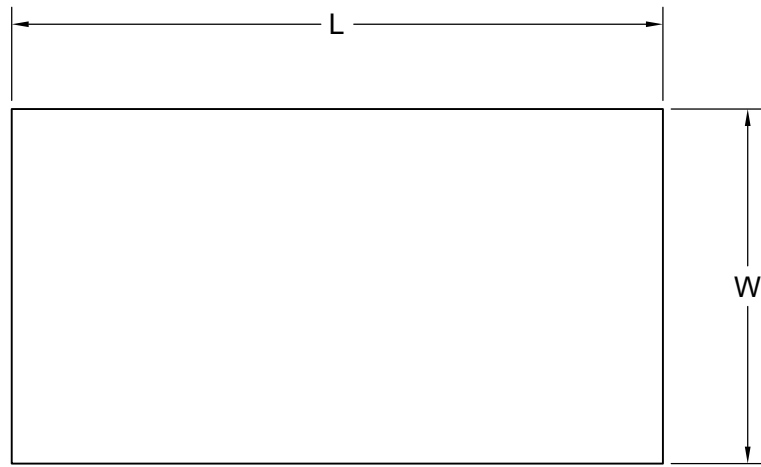

- NOTES:
1. STANDARD THICKNESS RANGES FROM .125 TO 1 INCH.
 2. CUSTOM CUT LENGTH & WIDTH AVAILABLE CONTACT VMC FOR AVAILABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

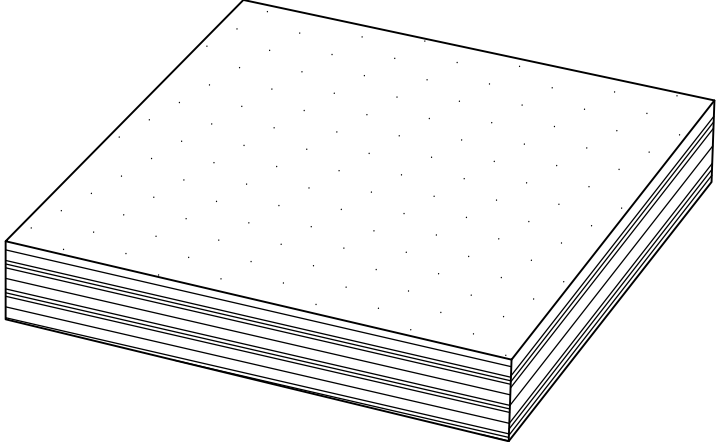

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL FABRI-FLEX REINFORCED
DUCK ISOLATION PAD**



| | | |
|--------------|--------|----------|
| SCALE: | NONE | |
| SHEET: | 1 OF 1 | |
| DRAWING NO.: | | REVISION |