


REV.	DESCRIPTION	DATE	BY



MODEL #	NOMINAL DIMENSIONS			LOAD MODE	SHOCK AVERAGE Klbs./in.	VIBRATION AVERAGE Klbs./in.	RATED DYNAMIC TRAVEL in.
	H	W1(REF)	W2(REF)				
JSQ5-100-T2	1.00	1.50	2.20	Compression	145	205	0.45
				Shear	90	100	0.45
				45 deg. C/R	85	150	0.60
JSQ5-120-T2	1.20	1.70	2.40	Compression	65	105	0.65
				Shear	35	45	0.65
				45 deg. C/R	40	75	0.90
JSQ5-145-T2	1.45	2.00	2.60	Compression	30	55	0.90
				Shear	15	20	0.90
				45 deg. C/R	20	30	1.25

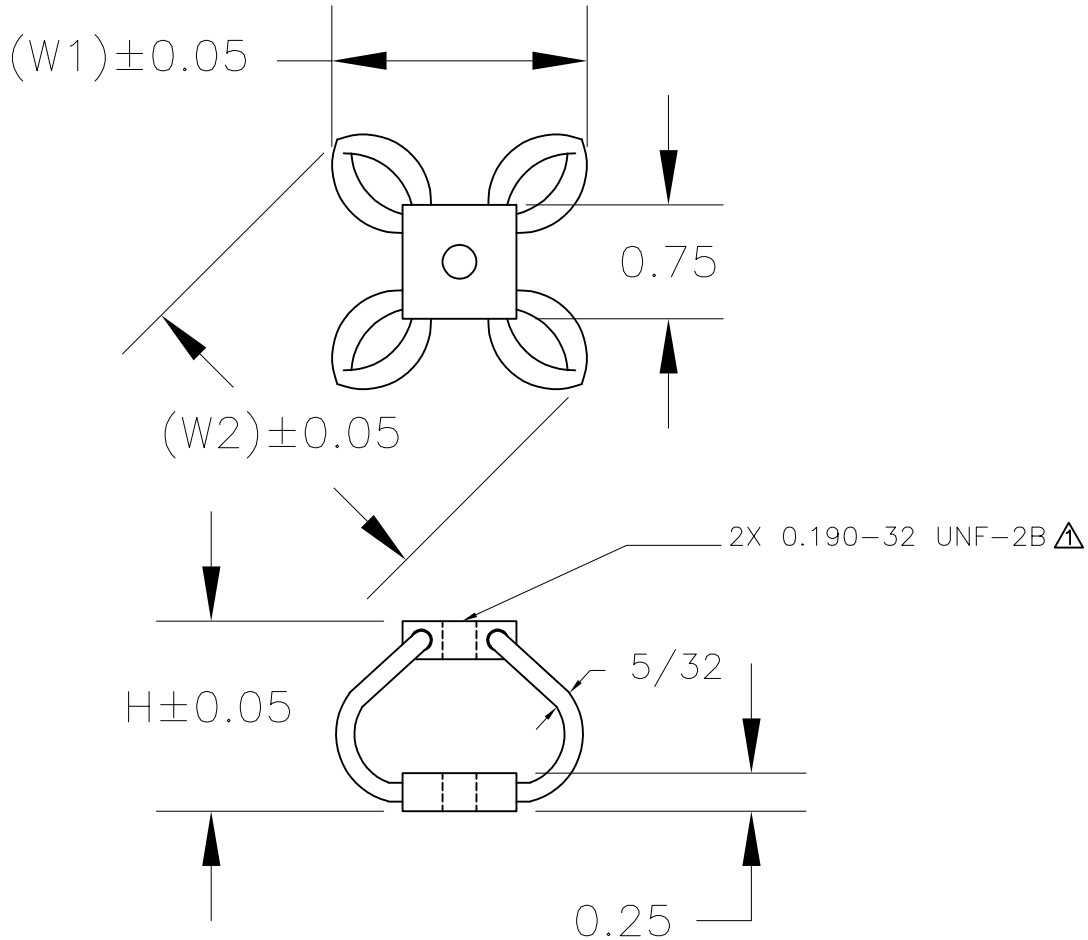

NOTES
 ⚠ SUFFIX-TM2 = METRIC M5x0.8 TAPPING

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL JSQ5 SERIES
 SQUARE WIRE ROPE
 ISOLATOR**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:
 NONE

SHEET:
 1 OF 1

DRAWING NO.:

REVISION

