



| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |

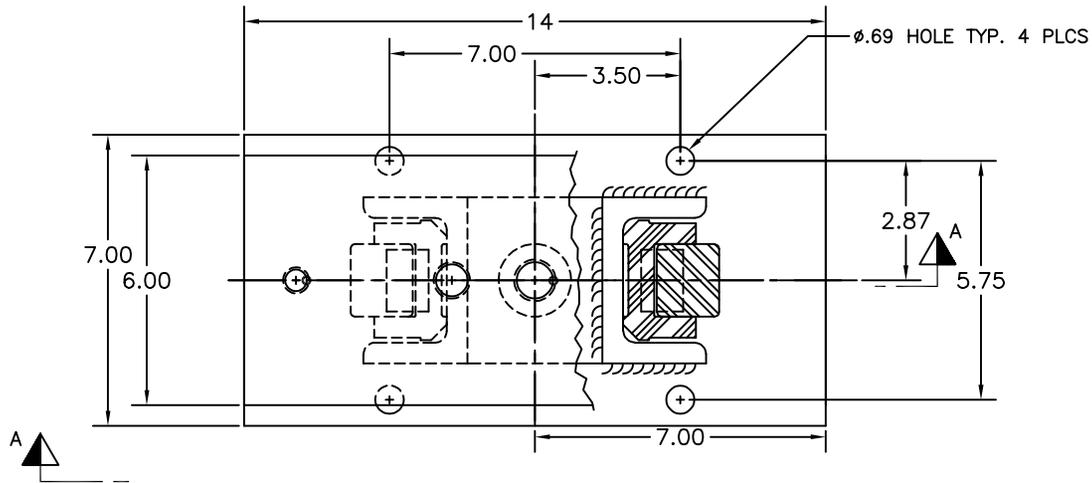

| ISOLATOR DESIGNATION | MAXIMUM STATIC LOAD (LBS) | ISOLATOR CONSTANT (LBS/IN) | DEFLECTION (IN) | MAX VERTICAL LOAD | MAX HORIZONTAL LOAD |
|----------------------|---------------------------|----------------------------|-----------------|-------------------|---------------------|
| KMSE-51 | 400 | 250 | 1.60 | 10,000 LBS | 5,800 LBS |
| KMSE-52 | 640 | 480 | 1.33 | | |
| KMSE-53 | 960 | 760 | 1.26 | | |
| KMSE-54 | 1600 | 1380 | 1.16 | | |
| KMSE-55 | 2240 | 2240 | 1.00 | | |
| KMSE-56 | 3840 | 6600 | 0.58 | | |

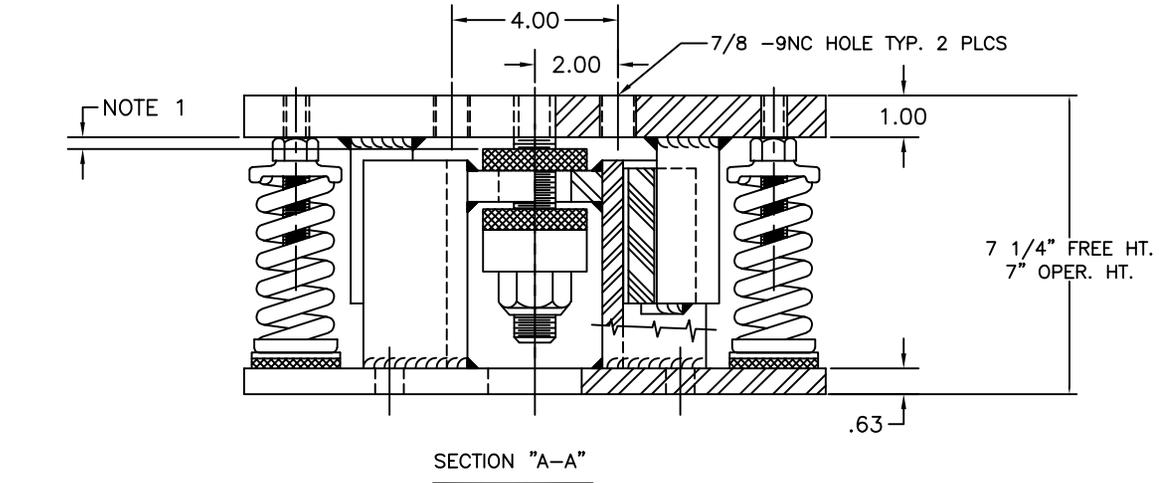

- NOTES:
- ADJUST CLEARANCE ABOVE AND BELOW TO 1/8" TO 1/4"
 - ALL SIZES ARE DESIGNED TO WITHSTAND VERTICAL AND HORIZONTAL FORCES DUE TO ROLL, PITCH AND SLAMMING OF SEAGOING VESSELS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL KMSE 400-5200 LBS.
MARINE ISOLATORS**

VMC GROUP
THE POWER OF TOGETHER™
Bloomingdale, NJ 07403
Houston, TX 77041

| | | |
|--------------|--------|----------|
| SCALE : | NONE | |
| SHEET: | 1 OF 1 | |
| DRAWING NO.: | | REVISION |