
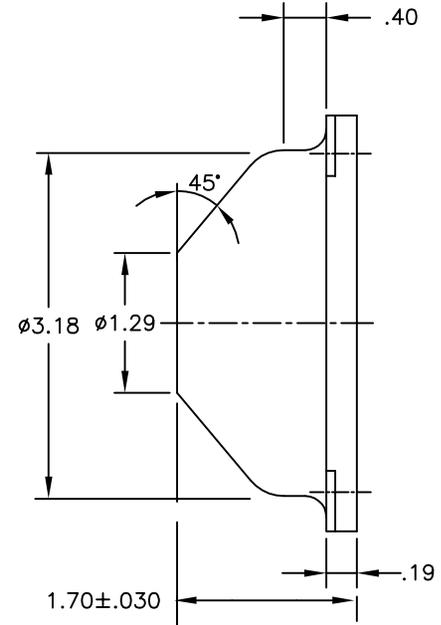
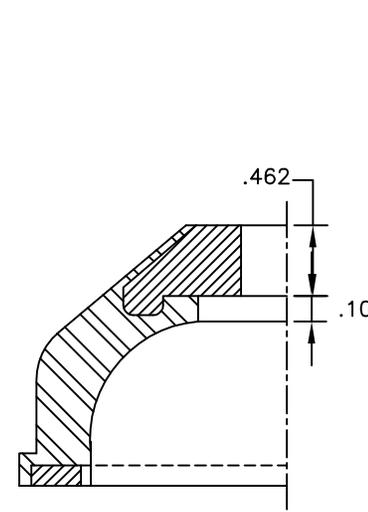


118R-103954 REV.: 3

REV.	DESCRIPTION	DATE	BY

PART NO.	MODEL NO.	DUROMETER	COMMENT
LD2-20S	LD2-20S	50 ± 5	SILICONE
LD2-10S	LD2-10S	30 ± 5	SILICONE
LD2-30S	LD2-30S	60 ± 5	SILICONE

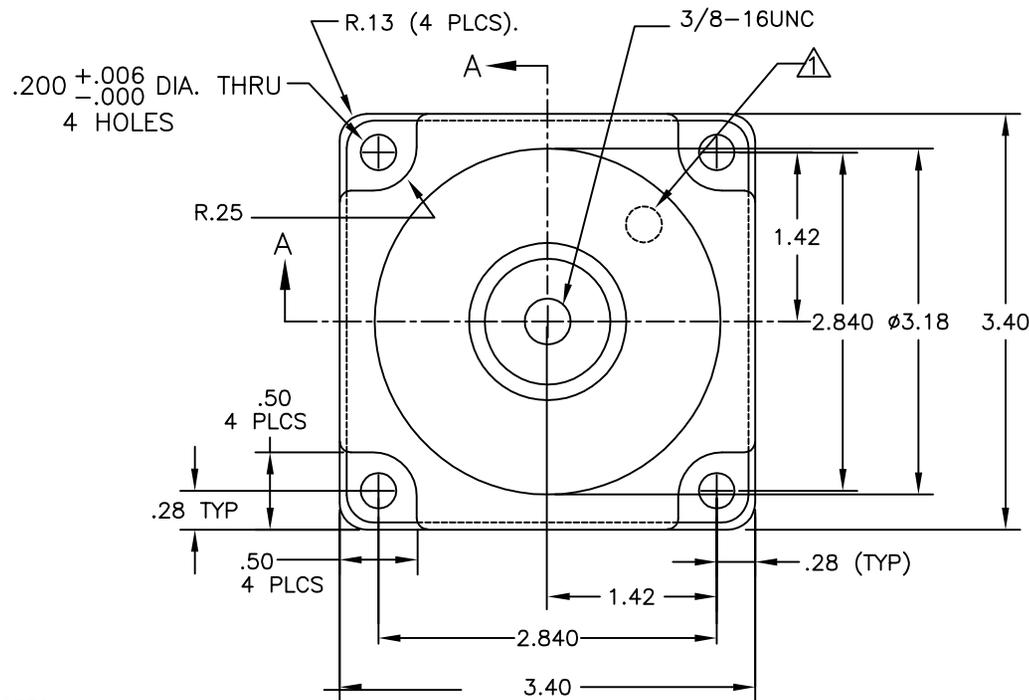

NOTES:

-  COLOR CODE PER TABLE. LOCATION IS APPROXIMATE WHERE SHOWN. MARKING CONFIGURATION IS OPTIONAL AND SIZE TO BE CONTAINED WITHIN A .38 MAX. DIAMETER LIMIT.
- MARK PART NO. PER INK STAMP. (SEE DURO IN TABLE ABOVE). .12 HIGH CHARACTERS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL LD2-[S] 10-30 LBS.  
 HIGH DEFLECTION  
 SILICONE  
 ELASTOMERIC ISOLATOR**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION