
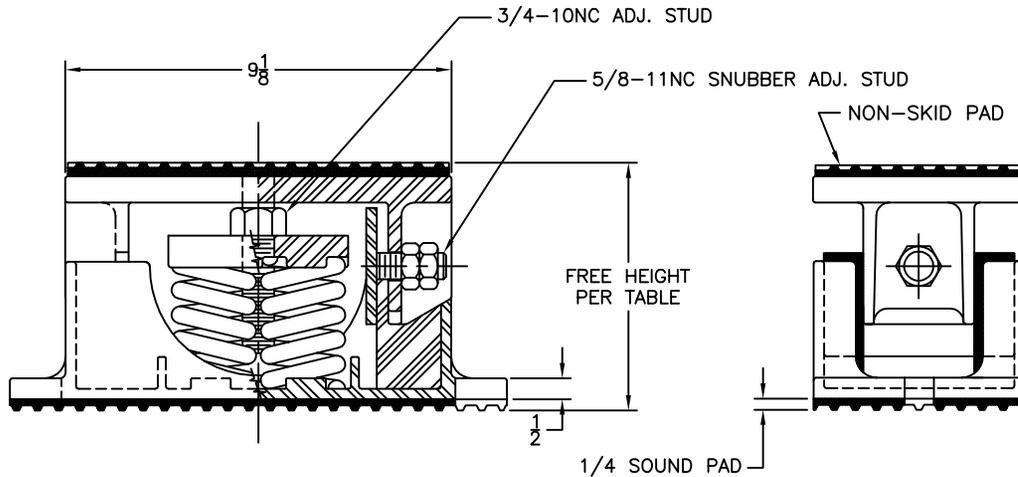


REV.	DESCRIPTION	DATE	BY

PART NUMBER	ISOLATOR MODEL	MAX. STEADY (LBS)	MAX. IMPACT (LBS)	ISOLATOR CONSTANT (LBS)	MIN. FREE HEIGHT	COLOR CODE
603651-50	LIE-50	200	△	100	6 7/8	YELLOW
603651-51	LIE-51	500	△	250		ORANGE
603651-52	LIE-52	800	△	480		BROWN
603651-53	LIE-53	1200	△	760		BLACK
603651-54	LIE-54	2000	△	1380		GREEN
603651-55	LIE-55	2800	△	2240		BLUE
603651-56	LIE-56	4800	△	6600	5 1/2	PURPLE
603651-45	LIE-45	1300	1040	1760		BROWN
603651-46	LIE-46	1800	1440	3200	5 7/8	RED
603651-47	LIE-47	2400	1920	4900		PURPLE
603651-57	LIE-57	4400	3300	8520	5 7/8	BLUE
603651-68	LIE-68	5200	4900	10600		GREEN

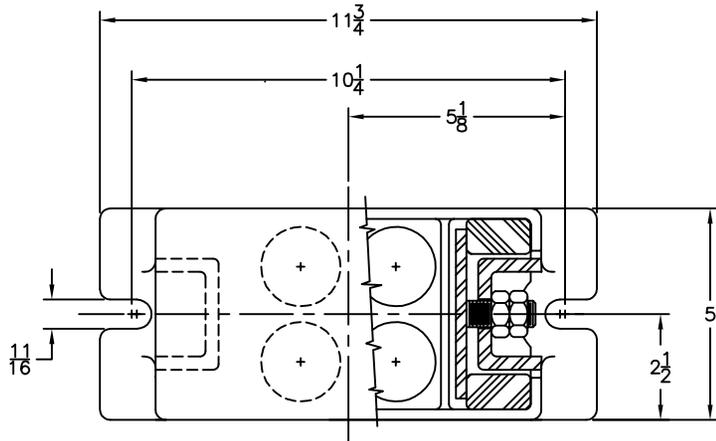

NOTES:

- ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14
- STANDARD FINISH: CONTACT VMC FOR ADDITIONAL AVAILABILITY
 - A. STEEL WELDMENTS: STANDARD VMC COLOR
 - B. SPRING: POWDER COATED
 - C. HARDWARE: ELECTRO-ZINC PLATED
- △ CURRENTLY UNDER ENGINEERING REVIEW
- EST. UNIT WEIGHT: 25 LBS.
- RECOMMENDED MAXIMUM TORQUING OF ISOLATORS BASE ANCHORS TO 5FT-LBS. AFTER EQUIPMENT IS INSTALLED.
- USE OF BLOCKING IS REQUIRED ALONGSIDE EACH ISOLATOR, EQUAL TO ISOLATOR FREE HEIGHT SO AS TO TEMPORARILY TRANSFER THE EQUIPMENT LOAD ONTO BLOCKING UNTIL THE LOAD IS TRANSFERRED TO THE SPRING BY TURNING ADJUSTING BOLT CAUSING ISOLATOR TO LIFT EQUIPMENT ABOVE BLOCKING. REMOVE BLOCKING AFTER INSTALLATION IS COMPLETE.
- HAND TIGHTEN SIDE SNUBBING BOLT.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL LIE 200-5200 LBS.
 SPRING ISOLATOR WITH
 ADJUSTABLE SNUBBER**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :

NONE

SHEET:



DRAWING NO.:

REVISION