
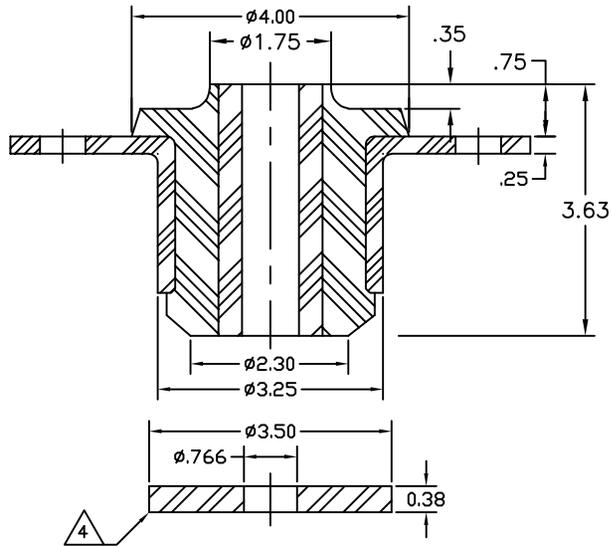


REV.	DESCRIPTION	DATE	BY

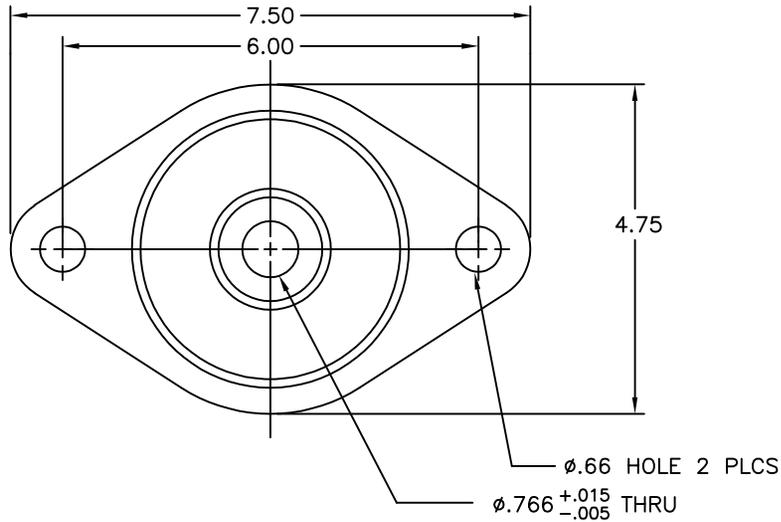

MODEL LLF3HS SNUBBING ISOLATOR			
PART NUMBER	MODEL NUMBER	AXIAL RATED LOAD (LBS)	COLOR CODE
105A-100616-01	LLF3HS-400	400	YELLOW
105A-100616-02	LLF3HS-700	700	BLUE
105A-100616-03	LLF3HS-1000	1000	RED
105A-100616-04	LLF3HS-1300	1300	GREEN

NOTES:

- MOLDED ELASTOMER AND STEEL MOUNT FOR AVERAGE INDUSTRIAL AND COMMERCIAL SERVICE CONDITIONS. FOR SPECIFIC USES AND ENVIRONMENTS CONSULT VMC.
 - FAIL SAFE USE REQUIRES INSTALLATION WITH PROPERLY TORQUED HIGH STRENGTH BOLTS, SUPPLIED BY CUSTOMER.
 - NOMINAL AXIAL DEFLECTION AT RATED AXIAL LOAD: 0.15 INCHES. MAXIMUM AXIAL DEFLECTION: 0.50 INCHES.
- 4 PLATED STEEL SNUBBING WASHER SUPPLIED WITH ISOLATOR.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL LLF3HS 400-1300 LBS.
 SNUBBED ELASTOMERIC ISOLATOR



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE	Member VISCMA
SHEET:	
DRAWING NO.:	REVISION