
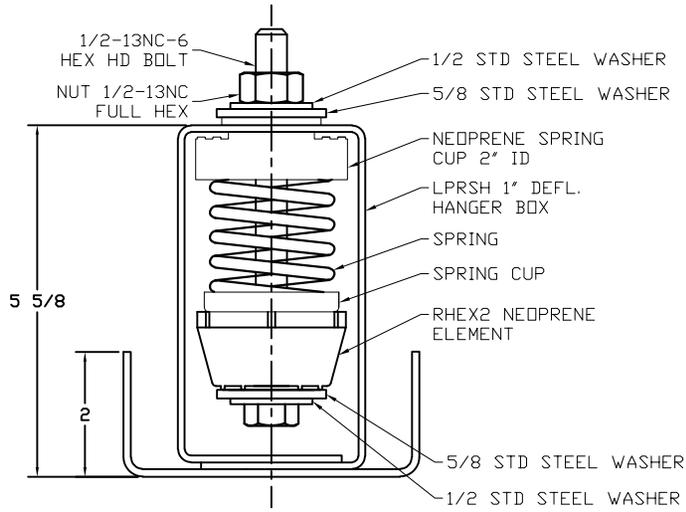


REV.	DESCRIPTION	DATE	BY

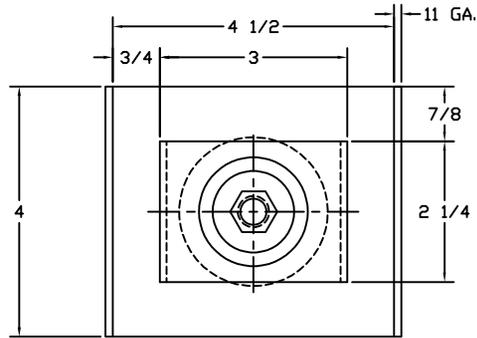

SECTION A-A


STYLE LPRSH-1C-[]-ODD SHOWN

NOTES:

- STANDARD FINISH: HANGER BOX; GALVANIZED STEEL, SPRING - POWDER COAT.
- ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14.
- ALL DIMENSIONS ARE FOR REFERENCE, DIMENSIONS SHOWN AS NOMINAL.
- ALL SPRINGS ARE DESIGNED WITH MINIMUM 20% OVER-TRAVEL.
- HANGER BOXES WITH AN ELASTOMERIC ELEMENT HAVE UP TO AN ADDITIONAL 1/4" NOMINAL DEFLECTION.
- SOME ASSEMBLIES MAY INCLUDE ADDITIONAL OR VARYING SIZE WASHERS.
- RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.
- SPRING TO BE PARTIALLY PRE-COMPRESSED FOR PROPER SPRING ASSEMBLY FIT.
- SEE SHEET 3 FOR ADDITIONAL PART NUMBER, OPTIONS AND ACCESSORIES.
- ALL HARDWARE ZINC COATED.

MODEL LPRSH-1C ELASTOMERIC & SPRING HANGER 1" DEFLECTION				
HANGER	RATED LOAD (LBS)	RATED DEFLECTION (IN)	SPRING RATE (LBS/IN)	COLOR CODE
LPRSH-1C-15	15	1.00	15	DK. GRAY
LPRSH-1C-25	25	1.00	25	GREEN
LPRSH-1C-50	50	1.00	50	BLUE
LPRSH-1C-100	100	1.00	100	TAN
LPRSH-1C-150	150	1.00	150	RED
LPRSH-1C-250	250	0.83	300	BLACK
LPRSH-1C-300	300	0.75	400	DK YELLOW
LPRSH-1C-370	370	0.75	493	YELLOW

⚠

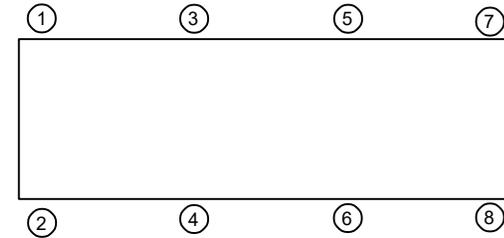

ISOLATOR SELECTIONS

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL LPRSH-1C 15-370 LBS.
 LOW PROFILE SPRING AND
 ELASTOMERIC ISOLATOR
 1 INCH DEFLECTION**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:


1 OF 3

DRAWING NO.:




REVISION



REV.	DESCRIPTION	DATE	BY

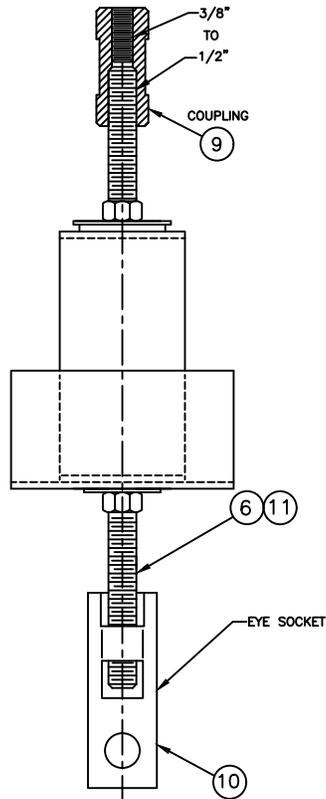

SEE SHEET 3 FOR OPTIONS / ACCESSORIES BOM

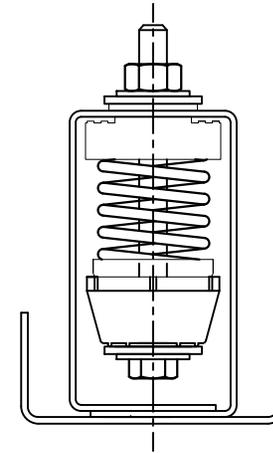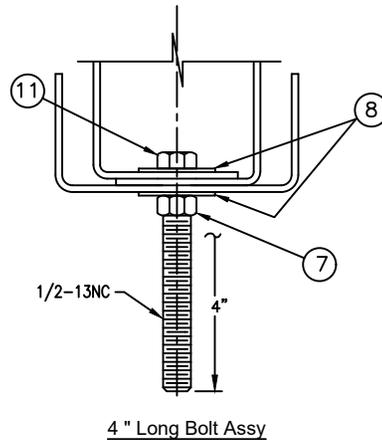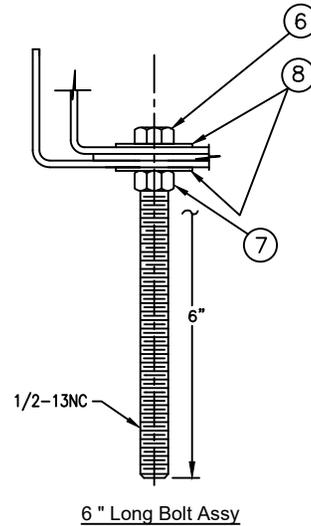

STYLE LPRSH-1C [] ODD

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL LPRSH-1C 15-370 LBS.
 LOW PROFILE SPRING AND
 ELASTOMERIC ISOLATOR
 1 INCH DEFLECTION



VMC GROUP

THE POWER OF TOGETHER

Bloomington, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:

2 OF 3

DRAWING NO.:

REVISION




REV.	DESCRIPTION	DATE	BY

	1								11	141119	BOLT, HEX. HD. 1/2-13NC X 4" LG. FULL THRD.,(LOWER)		
		1	1	2					10	141561-1	EYELET SOCKET, STRAIGHT		
					1	1	2		9	141562-1	COUPLING,REDUCER,ROD 1/2" - 3/8"		
2	2								8	141026	WSHR, FLAT 9/16 X 1 3/8 X 1/16 ,(LOWER) (1/2" STD.STL)		
1	1								7	141585	NUT, FULL HEX. 1/2"-13 NC-2B , (LOWER)		
1									6	141151	BOLT, HEX. HD. 1/2-13NC X 6" LG. FULL THRD., (LOWER)		
6	4	0	A	B	C	D	A	B	C	D			
LOWER BOLT OPTION			EYELET OPTION				COUPLING OPTION				ITEM #	PART/ DWG. #	DESCRIPTION

OPTIONS / ACCESSORIES B.O.M.

(IN ADDITION TO TABLE 1 ASSEMBLY)

PART NUMBER EXAMPLE

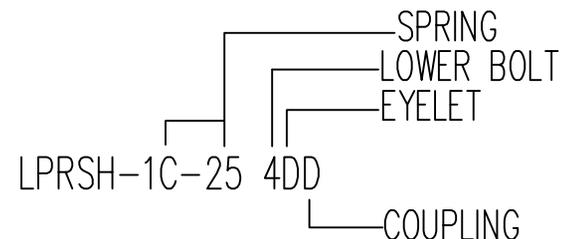

LPRSH

SPRING OPTION	COLOR CODE
1C- 15=15LBS.	DK. GREEN
1C- 25=25LBS.	GREEN
1C- 50=50LBS.	BLUE
1C- 100=100LBS.	TAN
1C- 150=150LBS.	RED
1C- 250=250LBS.	BLACK
1C- 300=300LBS.	DK. YELLOW
1C- 370=370LBS.	YELLOW

LOWER BOLT OPTION
O=NO BOLT
4=4"
6=6"

EYELET OPTION
A=TOP ONLY
B=BOTTOM ONLY
C=TOP&BOTTOM
D=NONE

COUPLING OPTION
A=TOP ONLY
B=BOTTOM ONLY
C=TOP&BOTTOM
D=NONE

PRODUCT NUMBER SUFFIX

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL LPRSH-1C 15-370 LBS.
 LOW PROFILE SPRING AND
 ELASTOMERIC ISOLATOR
 1 INCH DEFLECTION

VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :	NONE	Member VISCMA
SHEET:	3 OF 3	
DRAWING NO.:		REVISION