


REV.	DESCRIPTION	DATE	BY

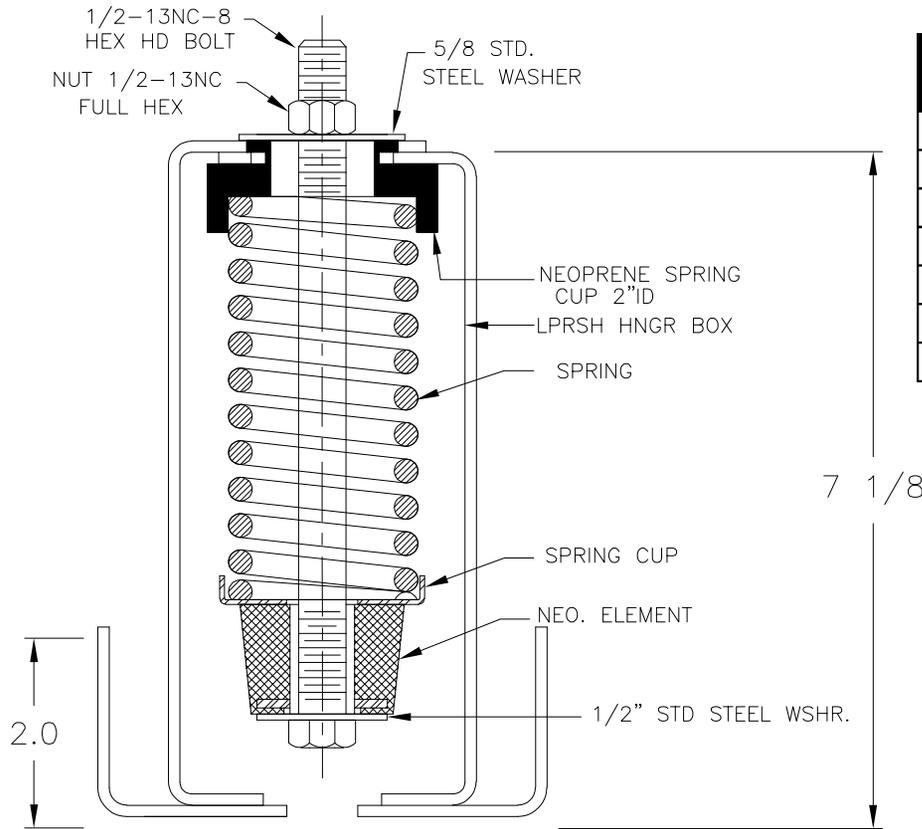


SECTION A-A
STYLE 2Q-[] ODD

NOTES:

1. ALL DIMENSIONS NOMINAL IN INCHES. INTERPRET PER ANSI Y14.
2. ALL HARDWARE ZINC COATED.
3. SEE SHEET 3 FOR ADDITIONAL PART NUMBER, OPTIONS AND ACCESSORIES.
4. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL.

MODEL DESIGNATION	MAX LOAD (LBS)	DEFL. (INS)	COLOR SPRING
LPRSH-2Q-90-0DD	90	2.5	DK. BLUE
LPRSH-2Q-110-0DD	110	2.39	BLACK
LPRSH-2Q-140-0DD	140	2.09	RED
LPRSH-2Q-195-0DD	195	2.07	DK GREEN
LPRSH-2Q-240-0DD	240	1.97	GRAY
LPRSH-2Q-340-0DD	340	2.00	YELLOW
LPRSH-2Q-450-0DD	450	2.01	ORANGE

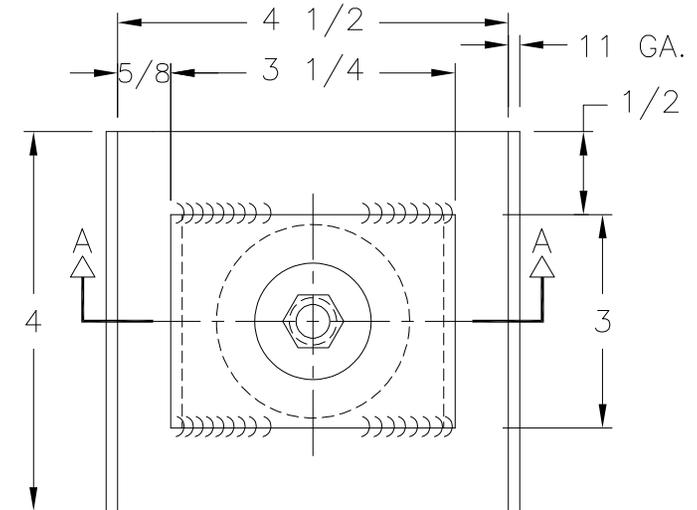

PLAN

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL LPRSH-2Q 90-450 LBS.
LOW PROFILE SPRING AND
ELASTOMERIC ISOLATOR
2 INCH DEFLECTION



VMC
GROUP

THE POWER OF TOGETHER™

Bloomington, NJ 07403
Houston, TX 77041

SCALE:

NONE

SHEET:


1 OF 3

DRAWING NO.:

REVISION




REV.	DESCRIPTION	DATE	BY

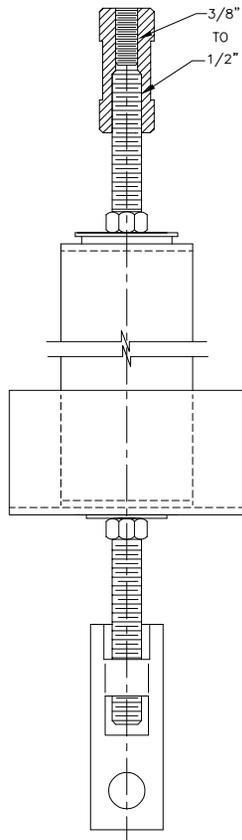


GEN. ASSY.


SEE SHEET 3 FOR
OPTIONS / ACCESSORIES BOM

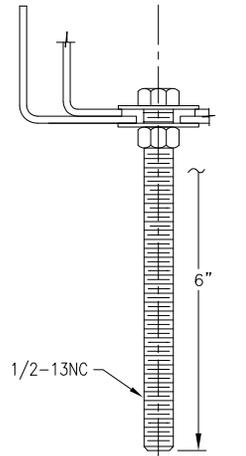

6 " Long Bolt Assy

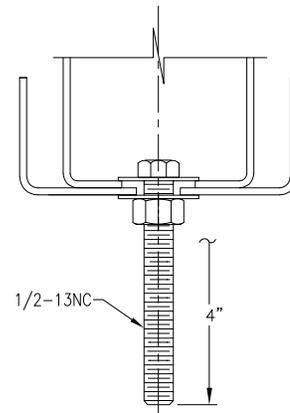

4 " Long Bolt Assy

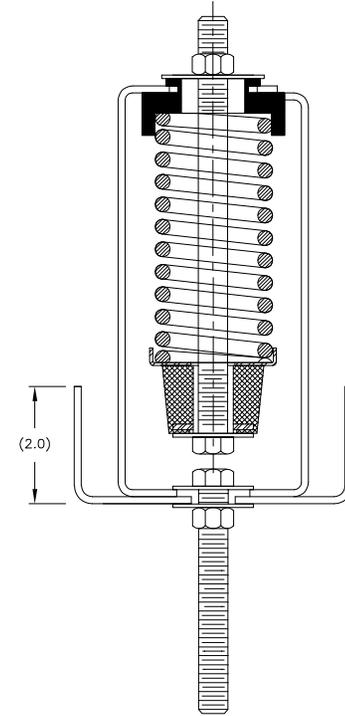

BASIC HANGER ASSY.
STYLE 2Q-[] 4DD

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL LPRSH -2Q 90-450 LBS.
 LOW PROFILE SPRING AND
 ELASTOMERIC ISOLATOR
 2 INCH DEFLECTION



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :
 NONE


SHEET:
 2 OF 3

DRAWING NO.: _____ REVISION



REV.	DESCRIPTION	DATE	BY

PART NUMBER EXAMPLE

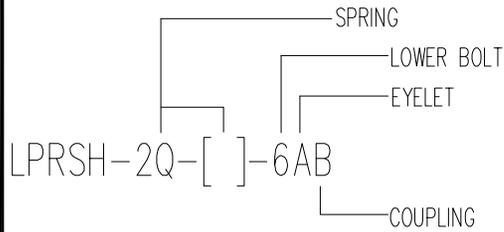

			1	1	2				11	141561-1	EYELET SOCKET, STRAIGHT		
							1	1	2	12	141562-1	COUPLING,REDUCER,ROD 1/2" - 3/8"	
	1									10	141119	BOLT, HEX. HD. 1/2-13NC X 4" LG. FULL THRD.,(LOWER)	
	2	2								9	141026	WSHR, FLAT 9/16 X 1 3/8 X 1/16 ,(LOWER) (1/2" STD.STL)	
	1	1								8	141585	NUT, FULL HEX. 1/2"-13 NC-2B , (LOWER)	
	1									7	141151	BOLT, HEX. HD. 1/2-13NC X 6" LG. FULL THRD., (LOWER)	
6	4	0	A	B	C	D	A	B	C	D			
LOWER BOLT OPTION			EYELET OPTION				COUPLING OPTION				ITEM #	PART/ DWG. #	DESCRIPTION

OPTIONS / ACCESSORIES B.O.M.

(IN ADDITION TO TABLE 1 ASSEMBLY)

PRODUCT NUMBER SUFFIX

LPRSH

SPRING OPTION	COLOR CODE
2Q-90=90LBS	DK. BLUE
2Q-110=110LBS	BLACK
2Q-140=140LBS	RED
2Q-195=195LBS	DK. GREEN
2Q-240=240LBS	GRAY
2Q-340=340LBS	YELLOW
2Q-450=450LBS	ORANGE
2Q-675=675LBS	WHITE

LOWER BOLT OPTION
0=NO BOLT
4=4"
6=6"

EYELET OPTION
A=TOP ONLY
B=BOTTOM ONLY
C=TOP&BOTTOM
D=NONE

COUPLING OPTION
A=TOP ONLY
B=BOTTOM ONLY
C=TOP&BOTTOM
D=NONE

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL LPRSH -2Q 90-450 LBS.
 LOW PROFILE SPRING AND
 ELASTOMERIC ISOLATOR
 2 INCH DEFLECTION



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :
 NONE
 SHEET:
 3 OF 3



DRAWING NO.: _____ REVISION _____