


108R-103413 REV.: 2


REV.	DESCRIPTION	DATE	BY

PART NO.	MODEL NO.	COMPOUND	DUROMETER	MAX. LOAD
770020-1	LR1-40	RC011	32 ± 4	40
770020-2	LR1-75	RC013	44 ± 4	75
770020-3	LR1-100	RC015	52 ± 4	100
770020-4	LR1-150	RC017	60 ± 4	150
770020-5	LR1-230	RC019	70 ± 4	230

TABLE

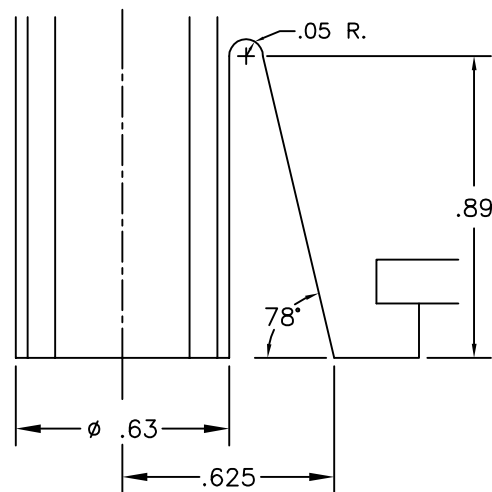

DETAIL B

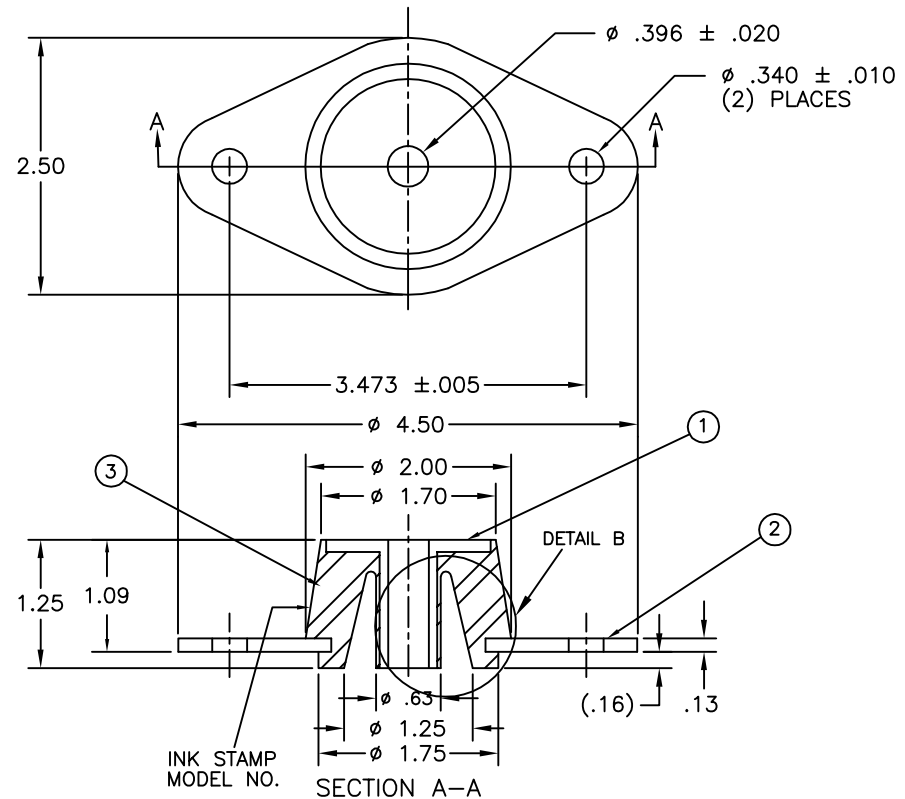

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

**MODEL LR1 40-230 LBS.  
LOW PROFILE  
ELASTOMERIC ISOLATOR**



**THE VMC GROUP**  
The Power of Together  
Bloomington, NJ 07403  
Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION