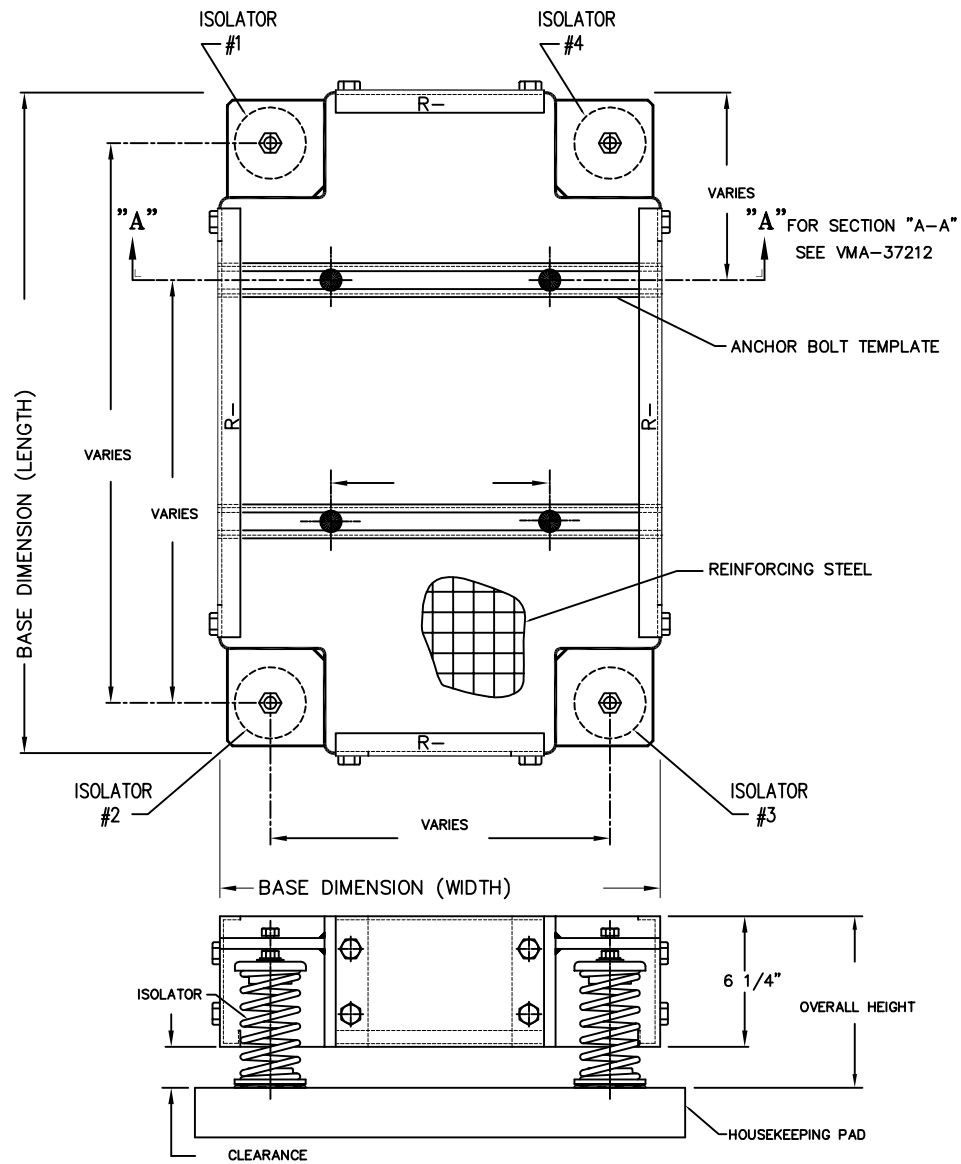


REV.	DESCRIPTION	DATE	BY

**NOTES:**

1. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

ISOLATORS

LOCATION	ISOLATOR TYPE	COLOR CODE	RATED LOAD (lbs.)	RATED DEFL (in.)
1				
2				
3				
4				

EQUIPMENT / MODEL:

CUST REF DWG:

MOTOR

FRAME SIZE:	HP	RPM	WT.
-------------	----	-----	-----

PUMP

SUCTION	DISCHARGE	WT.
---------	-----------	-----

CONCRETE	WT.
----------	-----

TOTAL ISOLATED	WT.
----------------	-----

TOTAL ESTIMATED SHIPPING WEIGHT:

TAG No. _____

QTY. REQ'D. _____

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MPF 6 INCH NON-SEISMIC MODULAR
POURING FORM INERTIA BASE
2 INCH DEFLECTION**



THE VMC GROUP
The Power of Together
Bloomington, NJ 07403
Houston, TX 77041

SCALE:

NONE

SHEET:

DRAWING NO.:

REVISION

