



REV.	DESCRIPTION	DATE	BY

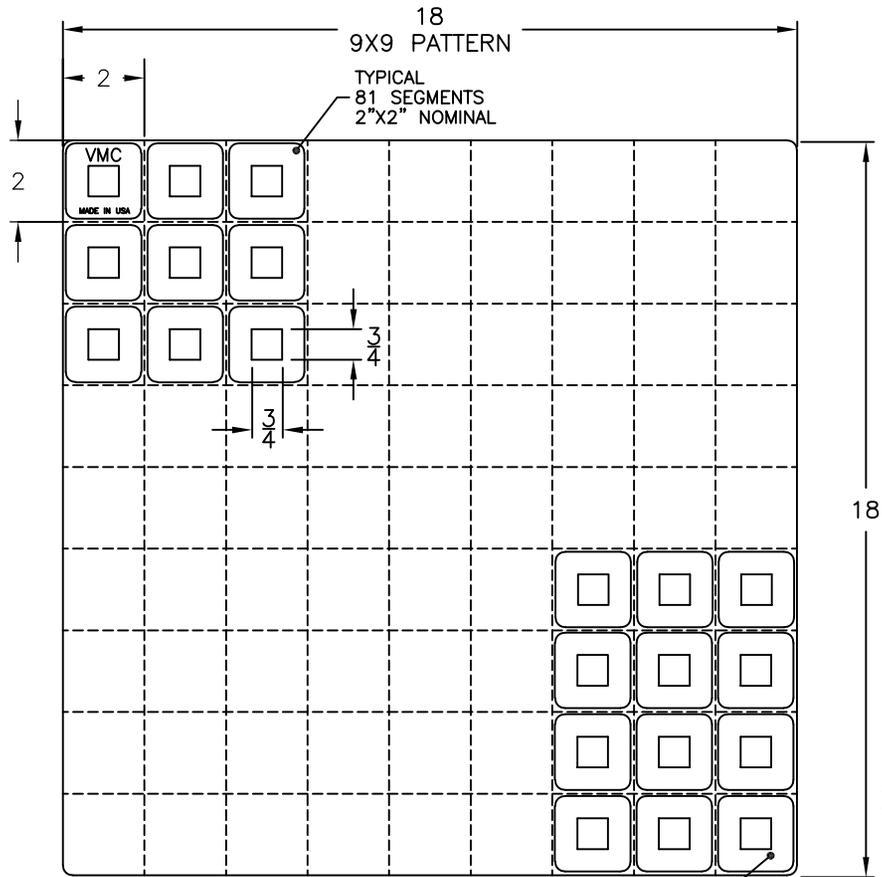

PART NUMBER	MODEL DESIGNATION	RATED COMPRESSIVE LOAD ON 2"X2" SEGMENT (LBS.)	MATERIAL COLOR	COLOR CODE MARKING	SHORE A DURO ±5
119A-100348-01	MAXI-FLEX 40EHT	180	BLUE	BLACK	40
119A-100348-02	MAXI-FLEX 50EHT	240	BLUE	RED	50
119A-100348-03	MAXI-FLEX 60EHT	360	ORANGE	GREEN	60
119A-100348-04	MAXI-FLEX 70EHT	480	ORANGE	GRAY	70

NOTE:
 1. RATED LOAD PROVIDES 15% (0.11 INCH) DEFLECTION.
 2. FOR INCREASED DEFLECTION, MAXI-FLEX CAN BE STACKED WITH 16 GAUGE SHIMS SEPARATING THE LAYERS.

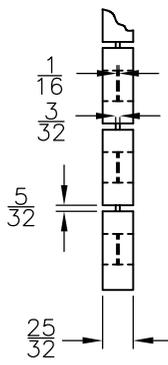

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
 2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 3. MOLDED ELASTOMER PAD, SECTIONABLE BY CUSTOMER.
 4. HIGH **TEMPERATURE LIMIT 450 DEGREES FAHRENHEIT** UNDER MOST CONDITIONS.
 5. NOT FOR USE IN AN OIL-SATURATED ENVIRONMENT.
 6. ADDITIONAL ELASTOMER TYPES & CAPACITIES AVAILABLE, CONTACT THE VMC GROUP FOR APPLICABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL MAXI-FLEX 180-480 LBS.
 EXTREME HIGH TEMPERATURE
 2 SQUARE INCH ELASTOMERIC PAD**

VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:	NONE	
SHEET:	1 OF 1	
DRAWING NO.:		REVISION