

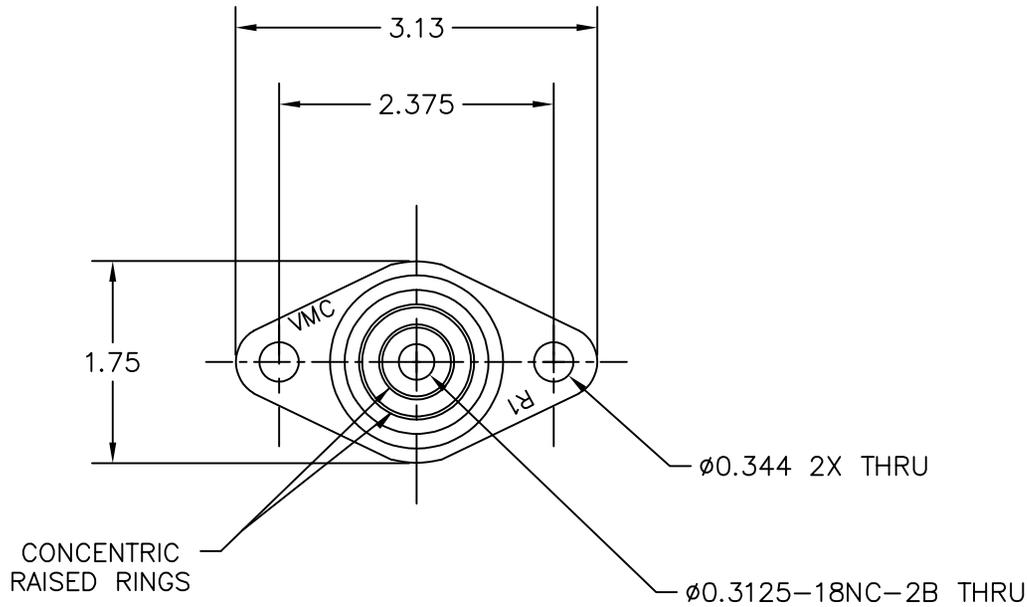


REV.	DESCRIPTION	DATE	BY

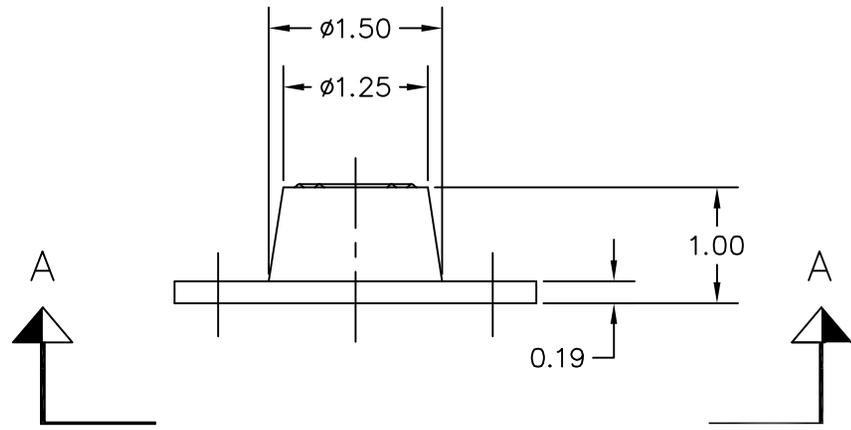

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS)	DEFLECTION (IN)
114A-100307-01	R1-BLUE-WR 35	35	0.20
114A-100307-02	R1-BROWN-WR 45	45	0.20
114A-100307-03	R1-RED-WR 70	70	0.20
114A-100307-04	R1-GREEN-WR 120	120	0.20
114A-100307-05	R1-GRAY-WR 250	250	0.20

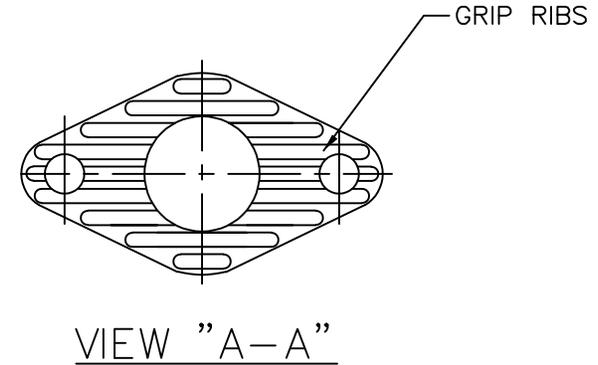

NOTES:

1. ALL DIMENSIONS ARE NOMINAL IN INCHES. INTERPRET PER ANSI Y14.
2. TABLE IS AVERAGE DESIGN DATA FOR REFERENCE.
3. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS.
4. ADDITIONAL ELASTOMER TYPES & CAPACITIES AVAILABLE, CONSULT VMC FOR APPLICABILITY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL R1 35-250 LBS.
DURULENE ELASTOMERIC ISOLATOR
0.20 INCH DEFLECTION**



VMC GROUP
THE POWER OF TOGETHER[®]
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE:	NONE	
SHEET:		
DRAWING NO.:		REVISION