



REV.	DESCRIPTION	DATE	BY

PART NO.	MODEL NO.	AXIAL STATIC LOAD MAX LBS.	RADIAL STATIC LOAD MAX LBS.	SHORE A DUROMETER ± 5	COLOR CODE DOT	MATERIAL
RB2-150EHT	RB2-150EHT	150	60	50	RED	BLUE EHT SILICONE
770006-4	RB2-300EHT	300	120	60	GREEN	RED EHT SILICONE
RB2-500EHT	RB2-500EHT	500	200	70	BLUE	ORANGE RED EHT SILICONE

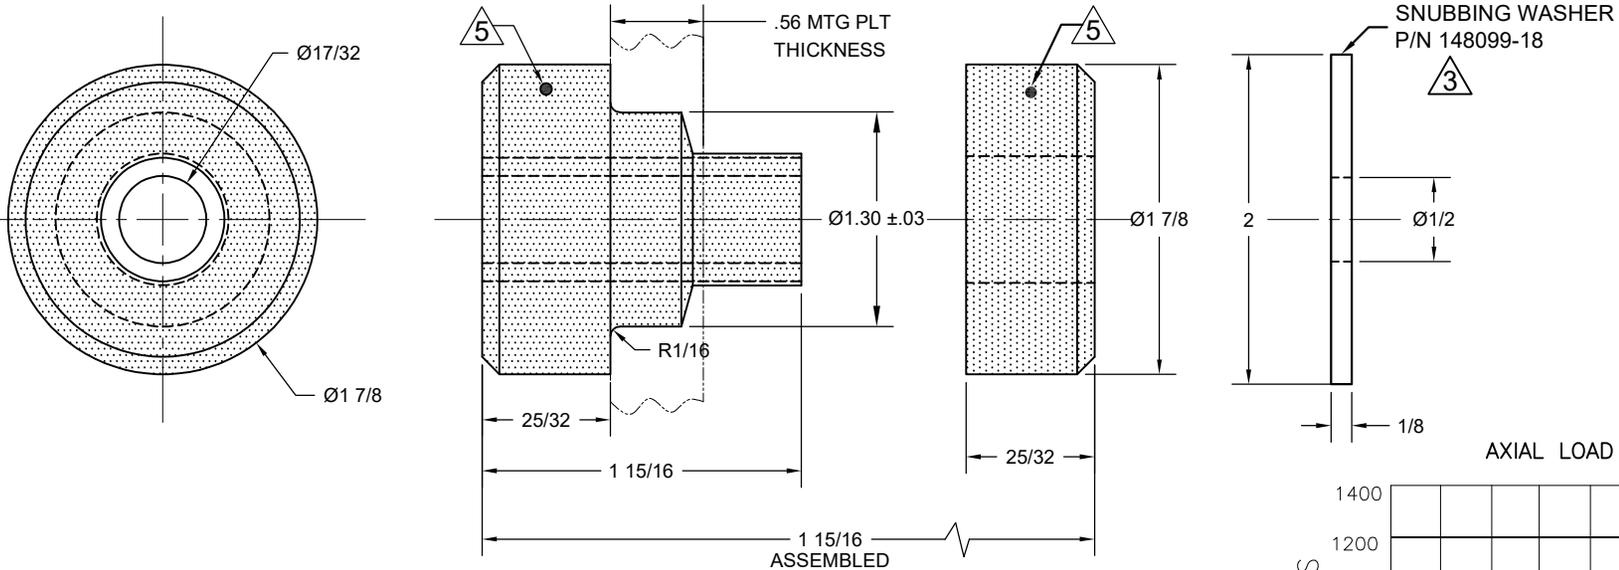

AXIAL LOAD Vs. DEFLECTION

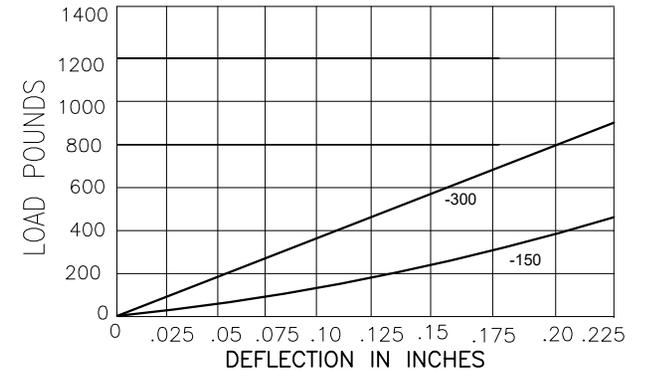

NOTES:

1. ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
3. SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER.
FINISH :YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED .
4. COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING .
5. STAMPING SURFACE LOCATION AS MARKED ON DRAWING.
6. 17/32" HOLE FOR 1/2" BOLT

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL RB2 150-500 LBS.
 EXTREME HIGH TEMPERATURE
 RING AND BUSHING
 ELASTOMERIC ISOLATOR**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :

NONE

SHEET:

1 OF 1

DRAWING NO.:

REVISION

