



REV.	DESCRIPTION	DATE	BY

PART NO.	MODEL NO.	AXIAL STATIC LOAD MAX LBS.	RADICAL STATIC LOAD MAX LBS.	DUROMETER ± 5	COLOR CODE	MATERIAL
770007-1	RB3-350	350	140	40	RED	BR BRG NEO
770007-2	RB3-700	700	300	60	GREEN	BR BRG NEO
770007-3	RB3-1300	1300	650	70	YELLOW	BR BRG NEO

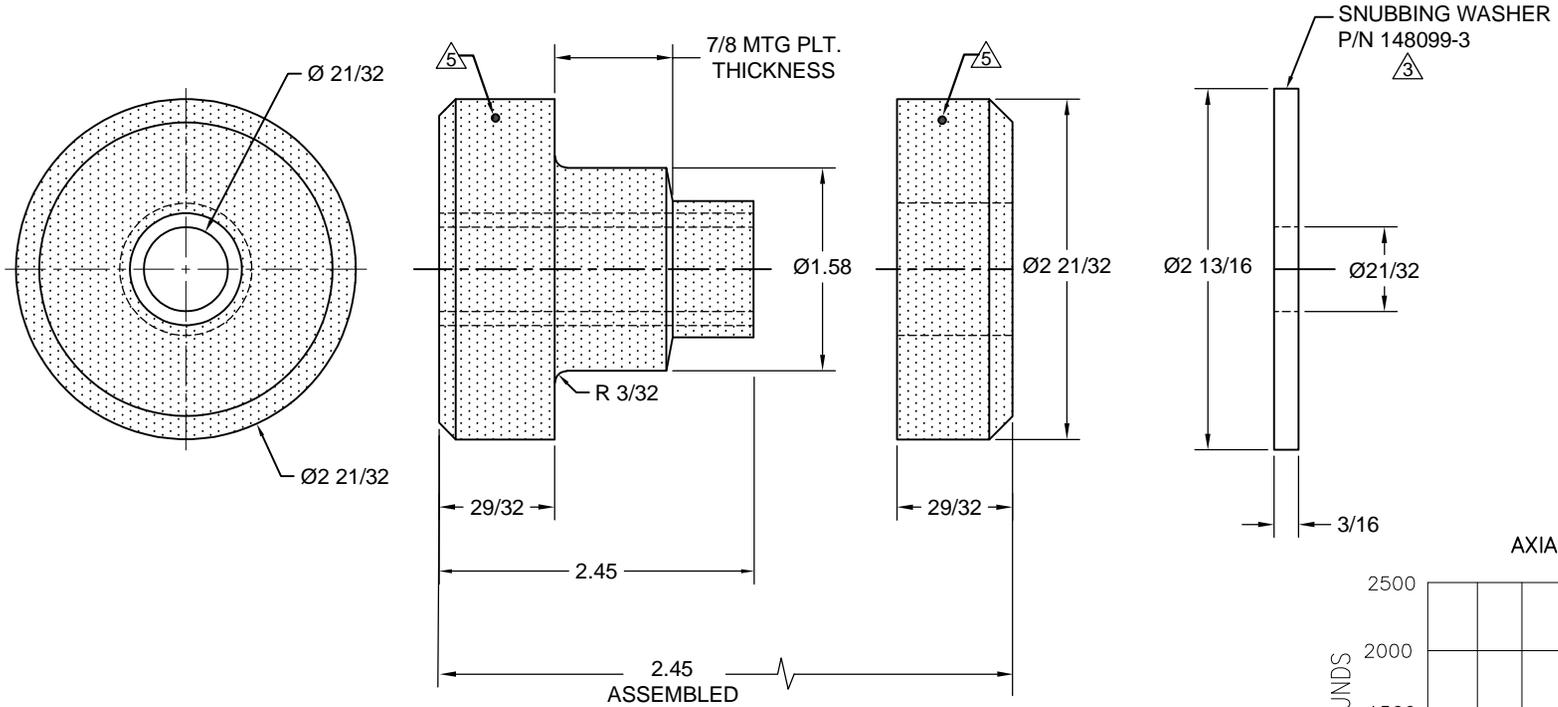

AXIAL LOAD Vs. DEFLECTION

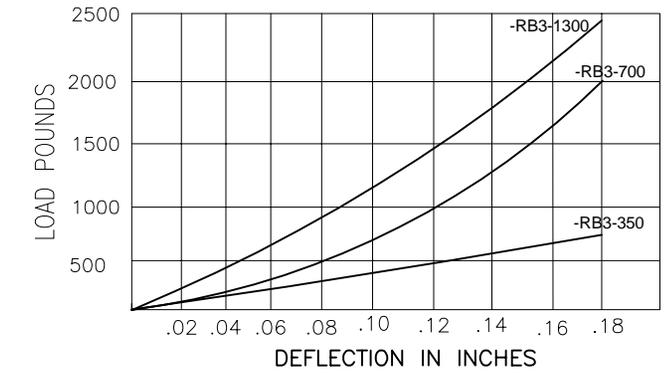

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

- NOTES:
- ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
 - ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 - SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER.
FINISH: YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED.
 - COLOR-CODE "MARK" IS AN ACCEPTABLE ADDITION TO MODEL STAMPING.
 - STAMPING SURFACE LOCATION AS MARKED ON DRAWING.
 - 21/32" HOLE FOR 5/8" BOLT

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL RB3 350-1300 LBS.
RING AND BUSHING
ELASTOMERIC ISOLATOR**

VMC GROUP
THE POWER OF TOGETHER™
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE: NONE

SHEET: _____

DRAWING NO.: _____

REVISION: _____