
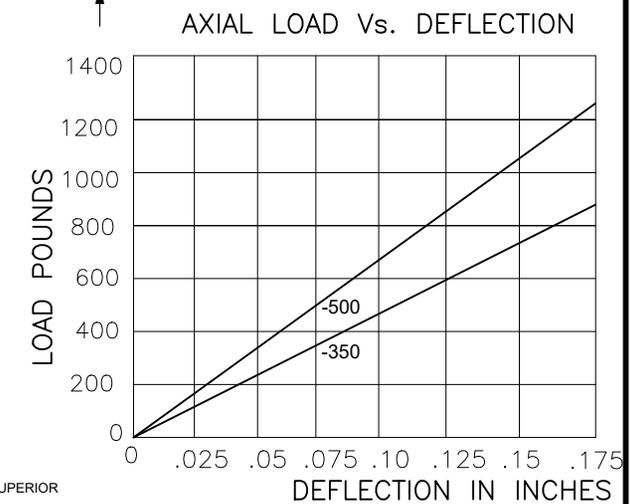


REV.	DESCRIPTION	DATE	BY

TYPE RBS2 ELASTOMERIC RING & BUSHING NITRILE						
PART NO.	MODEL NO.	AXIAL STAIC LOAD MAX. @.075"	RADIAL STATIC LOAD MAX LBS. @.03"	DUROMETER SHORE-A ±5	COLOR CODE	MATERIAL
RBS2-350Ni	RBS2-350	350	140	55	RED	NITRILE
RBS2-500Ni	RBS2-500	500	200	70	BLUE	NITRILE

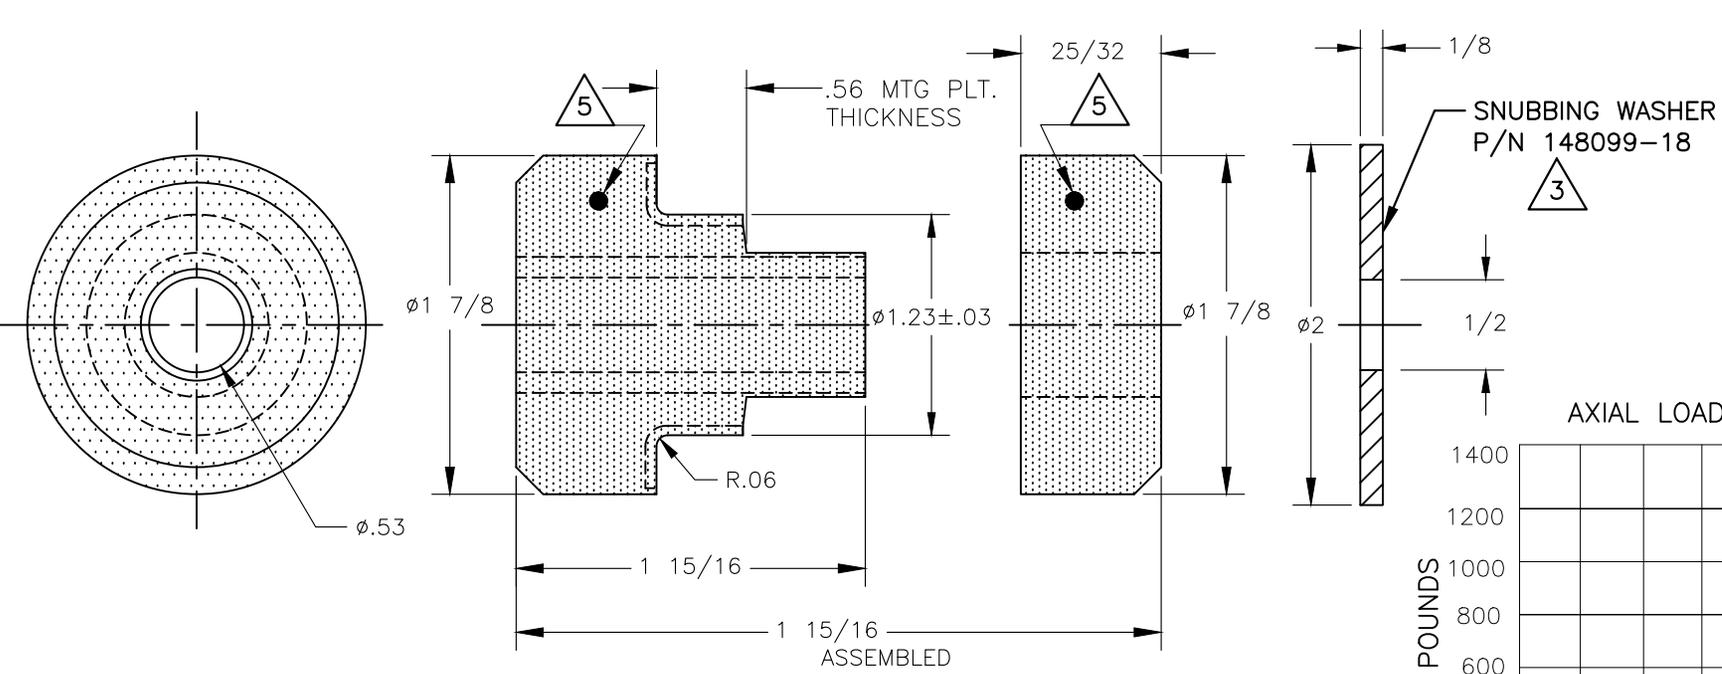

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
 2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 3. SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER.
 - FINISH :YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED .
 4. COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING .
 5. STAMPING SURFACE LOCATION AS MARKED ON DRAWING.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL RBS2
RING AND BUSHING
NITRILE
ELASTOMERIC ISOLATOR
WITH WEAR PLATE**



SCALE : NONE

SHEET: 1

DRAWING NO.: _____

REVISION _____