



REV.	DESCRIPTION	DATE	BY



RBX2-AXIAL LOAD Vs. DEFLECTION
(0.563" THICK MOUNTING PLATE)

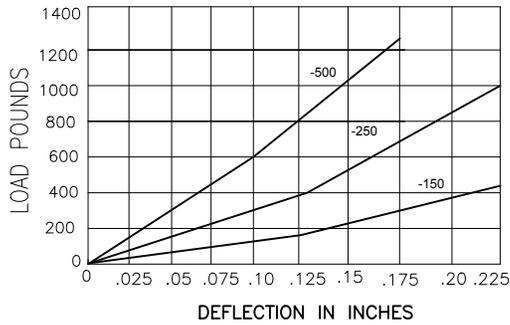

RBX2-AXIAL LOAD Vs. DEFLECTION
(0.50" THICK MOUNTING PLATE)

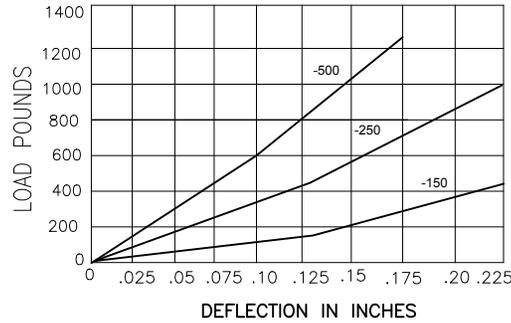

PART NO.	MODEL NO.	AXIAL STATIC LOAD MAX LBS.	RADIAL STATIC LOAD MAX LBS.	DUROMETER ± 5	COLOR CODE	MATERIAL
770074-1	RBX2-01	6	6	45	PURPLE/YELLOW	NITRILE
770074-2	RBX2-02			50	YELLOW/YELLOW	NITRILE
770074-3	RBX2-03			55	RED/YELLOW	NITRILE
770074-4	RBX2-04			60	BLUE/YELLOW	NITRILE
770074-5	RBX2-05			65	GREEN/YELLOW	NITRILE
770074-6	RBX2-150	150	75	40	BLUE	BR BRG NEO
770074-7	RBX2-260	260	130	60	GREEN	BR BRG NEO
770074-8	RBX2-08	6	6	60	RED	BR BRG NEO
770074-9	RBX2-500			70	PURPLE	BR BRG NEO
770074-10	RBX2-10			70	WHITE	NITRILE

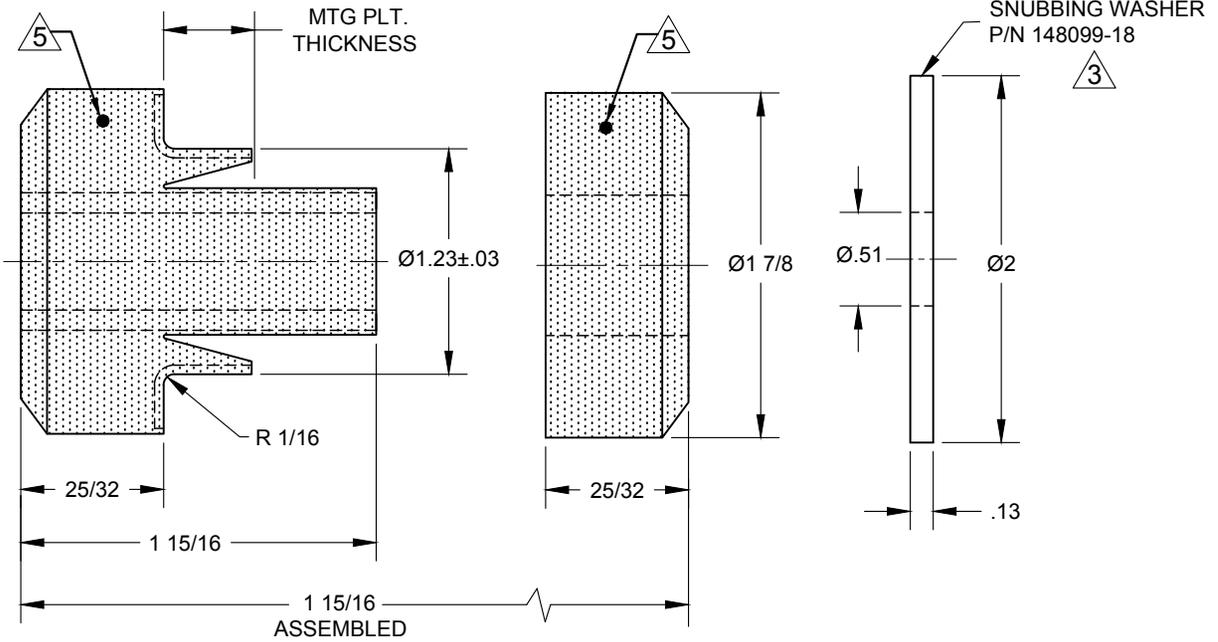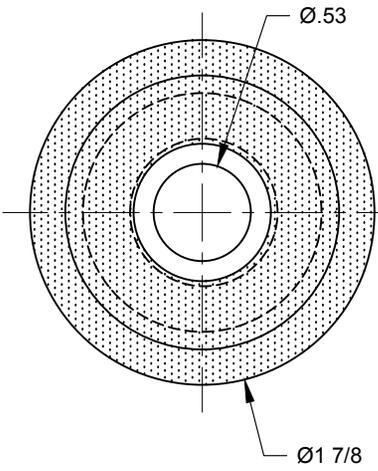

- NOTES:
- ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
 - ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 - SNUBBING WASHER IS OPTIONAL. ORDER SEPERATE ON PURCHASE ORDER.
FINISH :YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED .
 - COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING .
 - STAMPING SURFACE LOCATION AS MARKED ON DRAWING.
 - CURRENTLY UNDER ENGINEERING REVIEW CONTACT VMC FOR AVAILABILITY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL RBX2 150-260 LBS.
RING AND BUSHING
ELASTOMERIC ISOLATOR
WITH WEAR PLATE



SCALE :	NONE	
SHEET:		
DRAWING NO.:		REVISION