

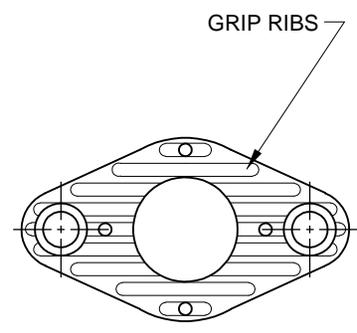


REV.	DESCRIPTION	DATE	BY

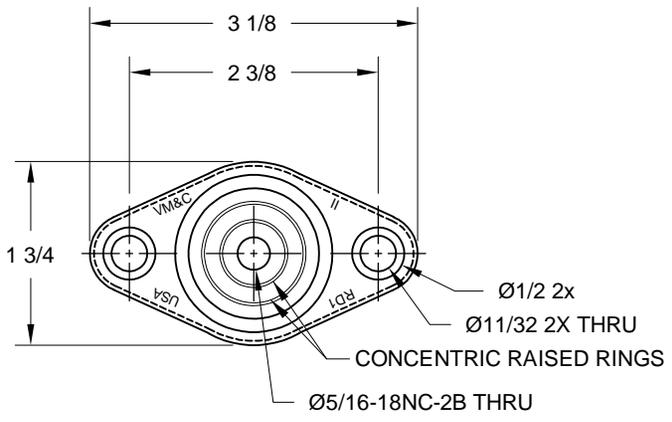

VIEW "A-A"

MODEL, ELASTOMERIC, RD1 DURULENE				
PART NUMBER	MODEL	RATED AXIAL	DURO ±5	RATED DEFLECTION
114A-100315-01	RD1-BLUE-WR	35	30	0.4
114A-100315-02	RD1-BROWN-WR	45	40	0.4
114A-100315-03	RD1-RED-WR	70	50	0.4
114A-100315-04	RD1-GREEN-WR	120	60	0.4
114A-100315-05	RD1-GRAY-WR	170	70	0.4

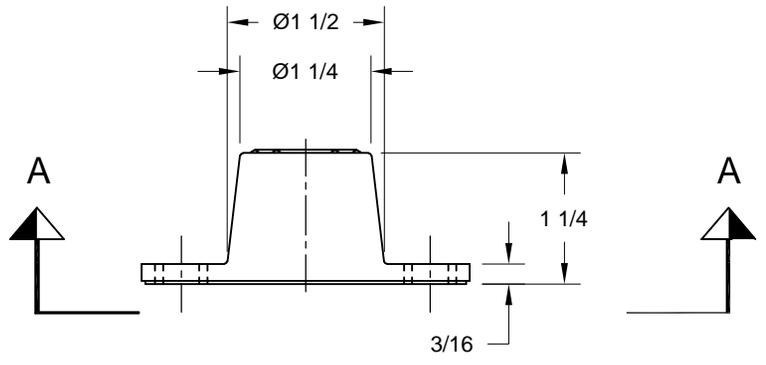

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.
 2. STANDARD FINISH: HARDWARE ZINC-ELECTROPLATE
 3. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS.
 4. CONSULT VMC FOR APPLICABILITY.

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQPT. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL RD1 35-170 LBS.
DURULENE ELASTOMERIC ISOLATOR
0.4 INCH DEFLECTION

SCALE: NONE

SHEET: _____

DRAWING NO.: _____

REVISION: _____