

REV.	DESCRIPTION	DATE	BY



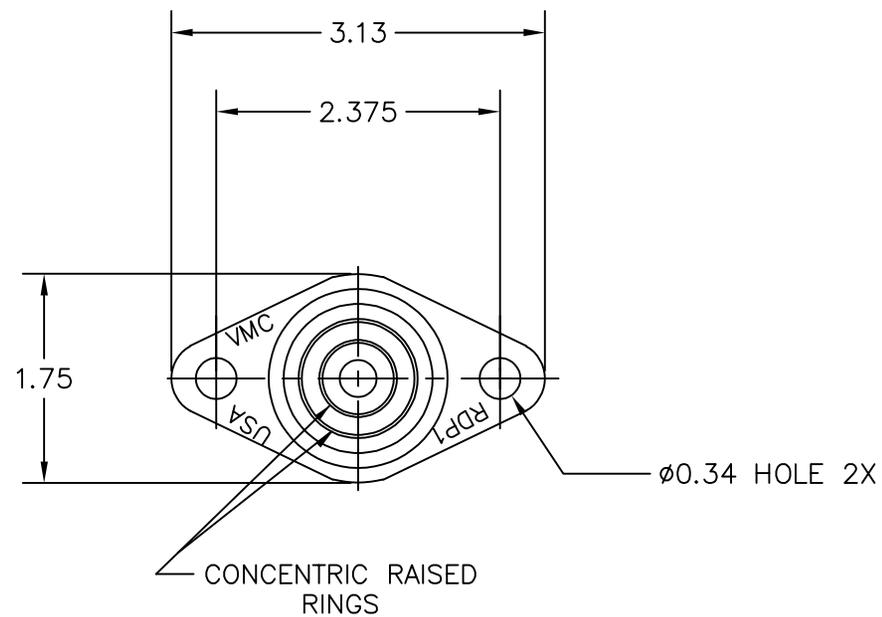


TABLE 1

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS.)	RATED DEFLECTION	COLOR CODE
114A-100419-01	RDP1-BLUE-WR	35	0.40	N/A
114A-100419-02	RDP1-BROWN-WR	45	0.40	N/A
114A-100419-03	RDP1-RED-WR	70	0.40	N/A
114A-100419-04	RDP1-GREEN-WR	120	0.40	N/A
114A-100419-05	RDP1-GRAY-WR	250	0.40	N/A
114A-100419-06	RDP1-PURPLE-WR	△	0.40	N/A
114A-100419-07	RDP1-WR-10	10	0.40	WHITE
114A-100419-08	RDP1-WR-15	15	0.40	YELLOW
114A-100419-09	RDP1-WR-25	25	0.40	RED

AXIAL TO RADIAL SPRING RATE (K) RATIO 3:1 NOMINAL

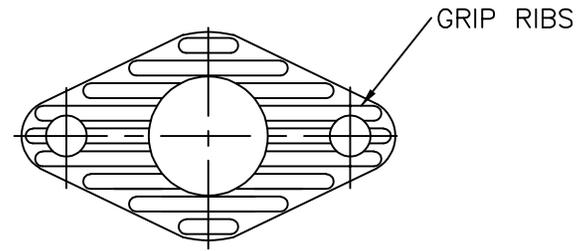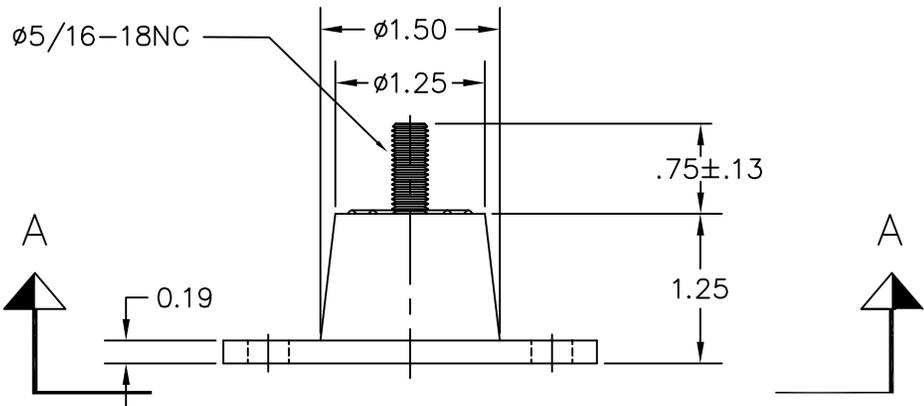

VIEW "A-A"

NOTES:

1. DIMENSIONS FOR CUSTOMER REFERENCE
2. TABLE 1 IS AVERAGE DESIGN DATA FOR REFERENCE.
3. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS.
4. CONSULT VMC FOR APPLICABILITY
- △ CONTACT VMC FOR APPLICABLE RATED LOAD.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL RDP1 35-250 LBS.
 DURULENE ELASTOMERIC
 ISOLATOR WITH POSITIONING
 PIN 0.20-0.40 INCH DEFLECTION



SCALE: NONE

SHEET: 1 OF 1

DRAWING NO.: _____

