


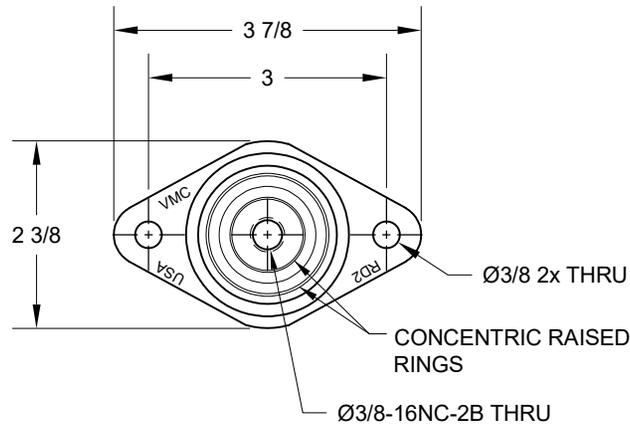


REV.	DESCRIPTION	DATE	BY

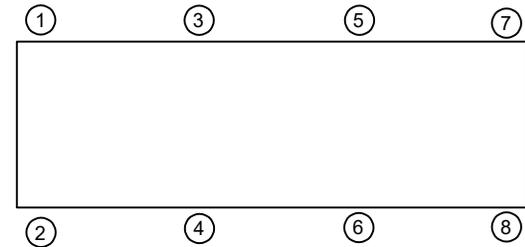

VIEW A-A

MODEL, ELASTOMERIC, RDP2 FOR 1/2" DEFLECTION				
PART NUMBER	MODEL	RATED AXIAL LOAD-LBS	DURO ±5%	RATED DEFLECTION
330248	RDP2-BLUE	135	30	0.5
330140	RDP2-BLACK	170	40	0.5
330043	RDP2-RED	240	50	0.5
330930	RDP2-GREEN	380	60	0.5
330833	RDP2-GRAY	550	70	0.5

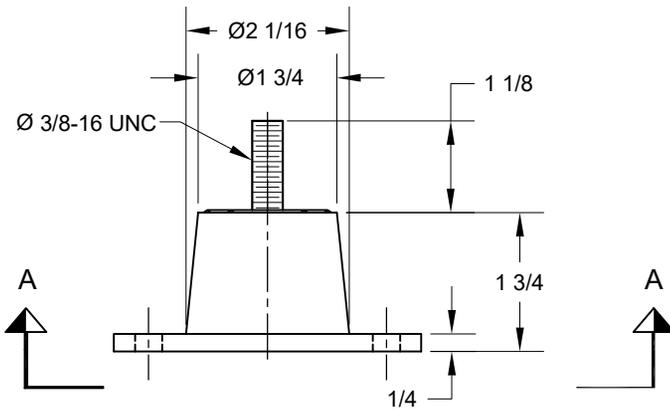

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQPT. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

- NOTES:
- ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.
 - STANDARD FINISH: HARDWARE ZINC-ELECTROPLATE
 - MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS. CONSULT VMC FOR APPLICABILITY.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RDP2 135-550 LBS.
 ELASTOMERIC ISOLATOR
 WITH POSITIONING PIN
 FOR 1/2" DEFLECTION



SCALE: NONE	Member VISCMA
SHEET: 1 OF 1	
DRAWING NO.:	REVISION