


REV.	DESCRIPTION	DATE	BY

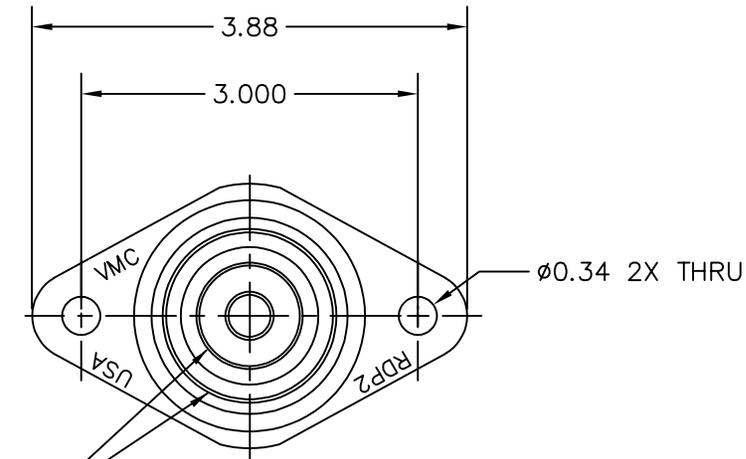

CONCENTRIC RAISED RINGS


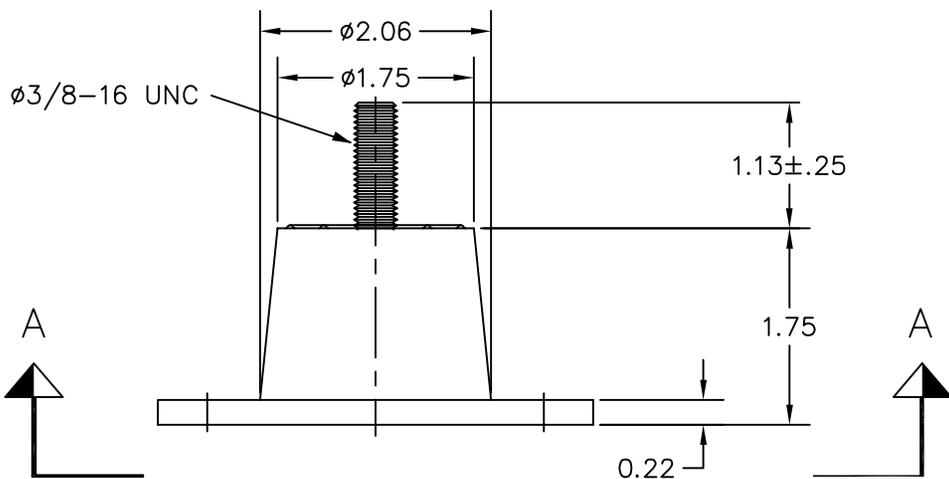


TABLE 1

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS.)	RATED DEFLECTION
114A-100421-01	RDP2-BLUE-WR	135	0.50
114A-100421-02	RDP2-BROWN-WR	170	0.50
114A-100421-03	RDP2-RED-WR	240	0.50
114A-100421-04	RDP2-GREEN-WR	380	0.50
114A-100421-05	RDP2-GRAY-WR	790	0.50
114A-100421-06	RDP2-PURPLE-WR	△5	0.50

AXIAL TO RADIAL SPRING RATE (K) RATIO 3:1 NOMINAL

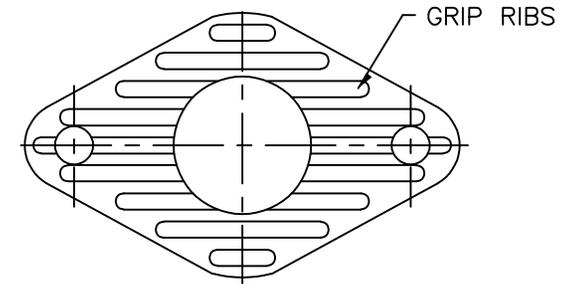

VIEW "A-A"

NOTES:

1. DIMENSIONS FOR CUSTOMER REFERENCE
 2. TABLE 1 IS AVERAGE DESIGN DATA FOR REFERENCE.
 3. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS.
 4. CONSULT VMC FOR APPLICABILITY
- △ CONTACT VMC FOR APPLICABLE RATED LOAD.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RDP2 135-790 LBS.
 DURULENE ELASTOMERIC
 ISOLATOR WITH POSITIONING
 PIN 0.50 INCH DEFLECTION



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:

1 OF 1

DRAWING NO.:

REVISION

