

REV.	DESCRIPTION	DATE	BY



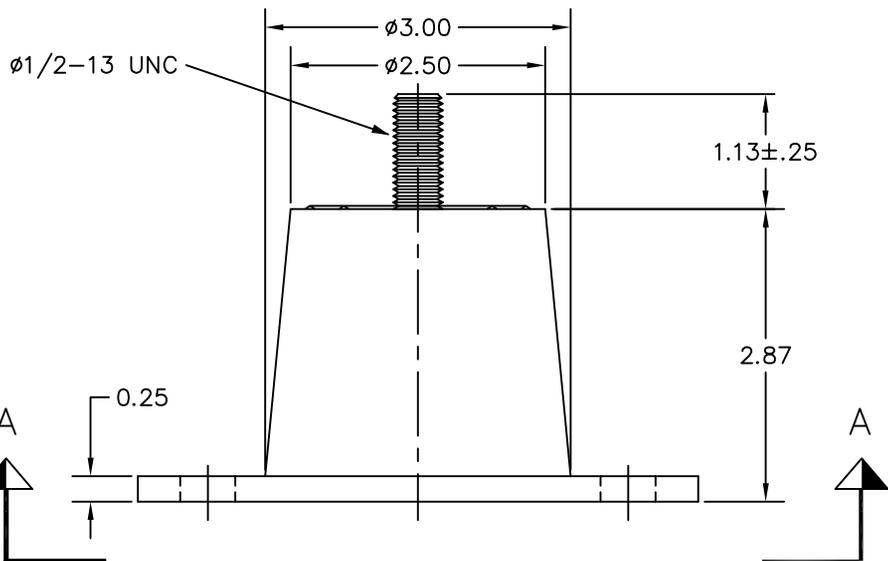


TABLE 1

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS.)	RATED DEFLECTION
114A-100423-01	RDP3-BLUE-WR	△	△
114A-100423-02	RDP3-BROWN-WR	250	0.50
114A-100423-03	RDP3-RED-WR	525	0.50
114A-100423-04	RDP3-GREEN-WR	750	0.50
114A-100423-05	RDP3-GRAY-WR	1500	0.50
114A-100423-06	RDP3-PURPLE-WR	△	0.50

AXIAL TO RADIAL SPRING RATE (K) RATIO 3:1 NOMINAL

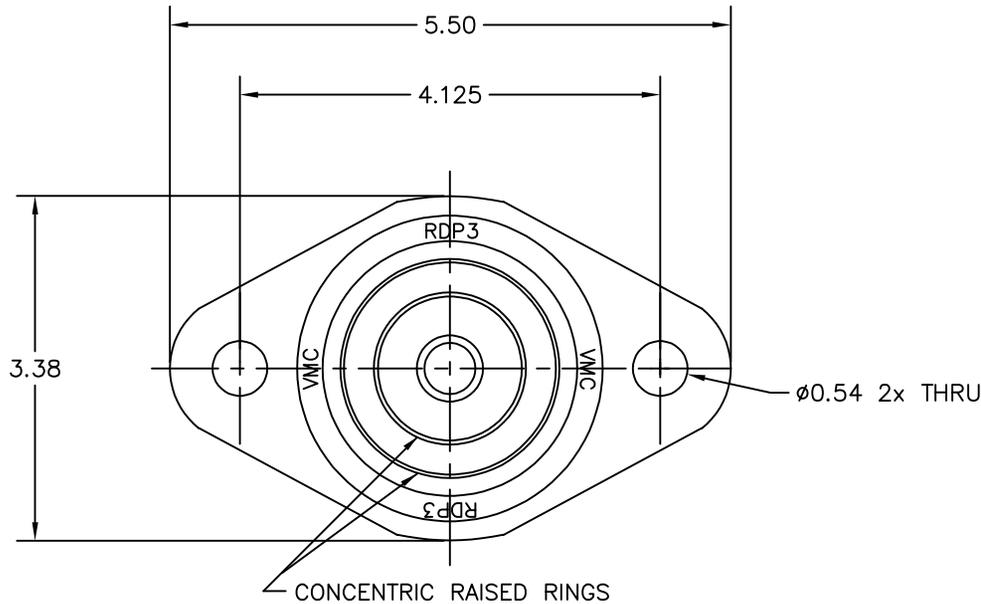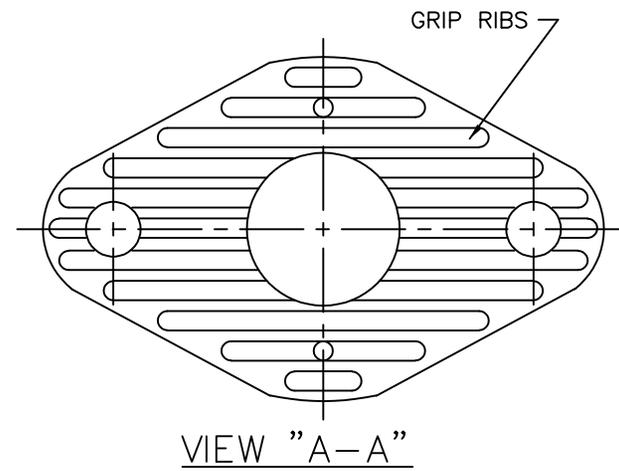

- NOTES:
1. DIMENSIONS FOR CUSTOMER REFERENCE
 2. TABLE 1 IS AVERAGE DESIGN DATA FOR REFERENCE.
 3. MOLDED STEEL AND ELASTOMER MOUNT FORNON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS.
 4. CONSULT VMC FOR APPLICABILITY
 5. CONTACT VMC FOR APPLICABLE RATED LOAD AND DEFLECTION.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RDP3 250-1500 LBS.
 DURULENE ELASTOMERIC
 ISOLATOR WITH POSITIONING
 PIN 0.50 INCH DEFLECTION



SCALE:	NONE	Member VISCMA
SHEET:	1 OF 1	
DRAWING NO.:		REVISION