

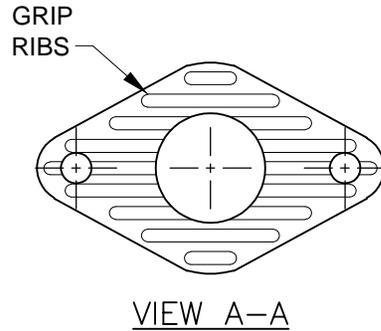
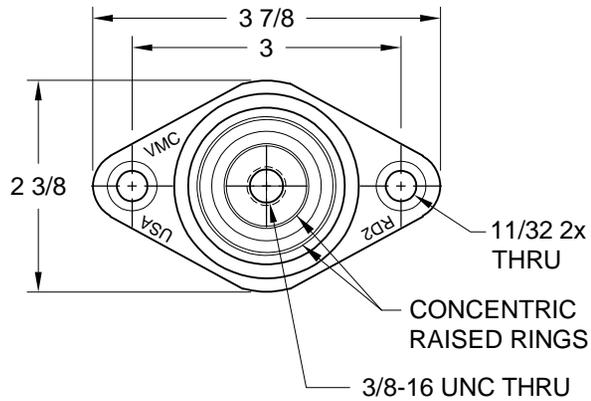


REV.	DESCRIPTION	DATE	BY

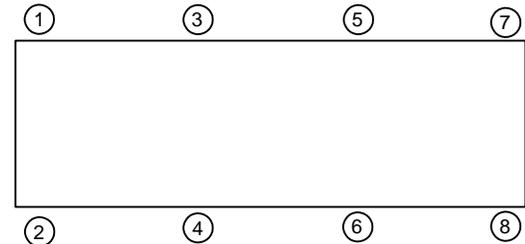

MODEL, ELASTOMERIC, RDX2 NITRILE					
PART NUMBER	MODEL	RATED AXIAL LOAD LBS	SHORE A DURO ±5%	RATED DEFLECTION	COLOR CODE
770071-7	RDX2-07	205	45	0.5	YELLOW/BLUE
770071-8	RDX2-08	240	50	0.5	PURPLE
770071-9	RDX2-09	170	35	0.5	YELLOW/RED
770071-10	RDX2-10	550	70	0.5	PINK

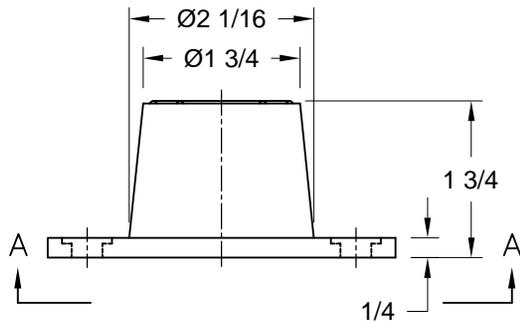

NOTES:

1. ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.
2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
3. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, SERVICE CONDITIONS. CONSULT VMC FOR APPLICABILITY.
4. A COLOR CODED DOT IS APPLIED TO THE ISOLATOR TO IDENTIFY MODEL TYPE.

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL RDX2 170-550 LBS.
 NITRILE ELASTOMERIC ISOLATOR
 0.5 INCH DEFLECTION**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :
 NONE
 SHEET:
 1 OF 1



DRAWING NO.: _____ REVISION _____