
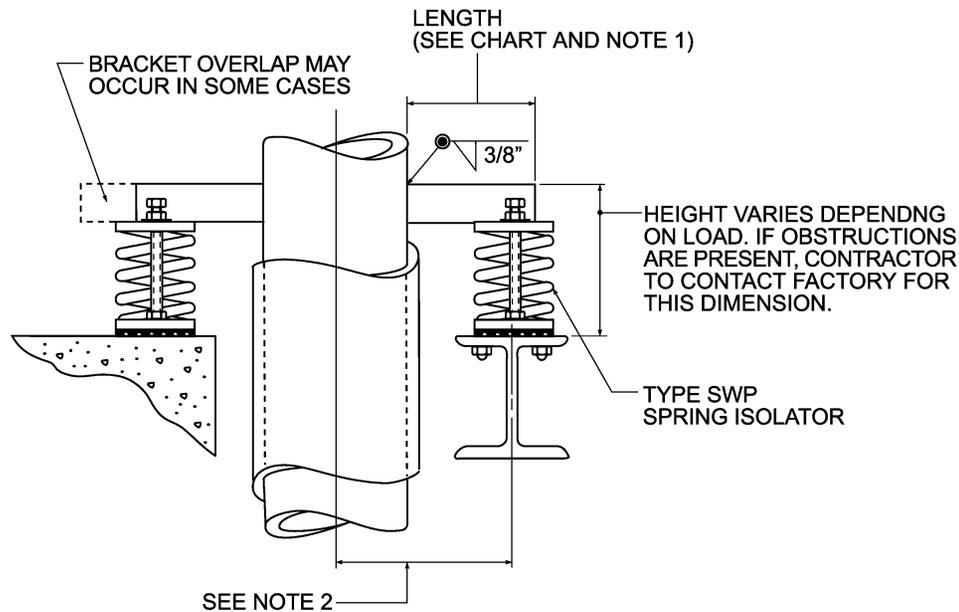


REV.	DESCRIPTION	DATE	BY

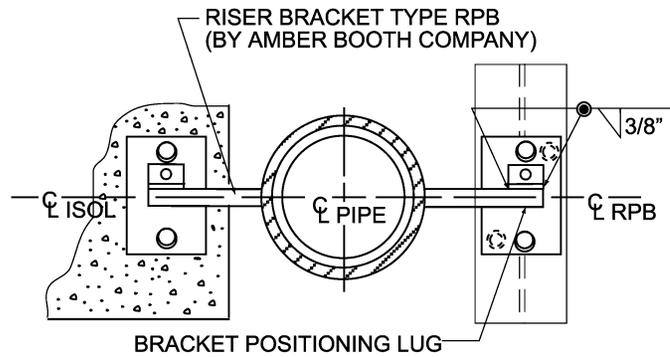

RISER BRACKET DESIGNATION	MAXIMUM SPRING LOAD (LB)	LENGTH (IN)
RPB-1-A	600	6
RPB-1-B	2000	
RPB-1-C	3800	
RPB-1-D	6200	
RPB-2-A	800	8
RPB-2-B	2000	
RPB-2-C	4400	
RPB-2-D	6600	
RPB-3-A	1000	10
RPB-3-B	2400	
RPB-3-C	5000	
RPB-3-D	7100	
RPB-4-A	800	12
RPB-4-B	2000	
RPB-4-C	4600	
RPB-4-D	7000	

NOTES:
 1) REFER TO DRAWINGS II-2212 FOR RPB INSTALLATION.
 2) FINISH INDUSTRIAL GRADE ENAMEL.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RPB BRACKET GUIDE



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :

NONE

SHEET:



DRAWING NO.:

REVISION