
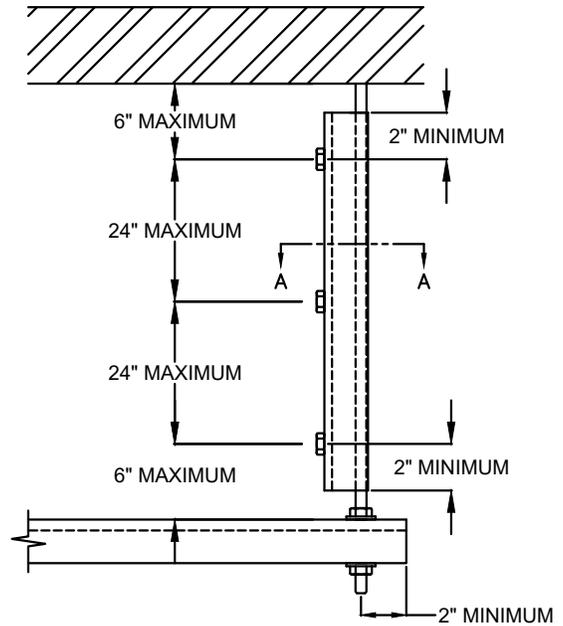


| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |

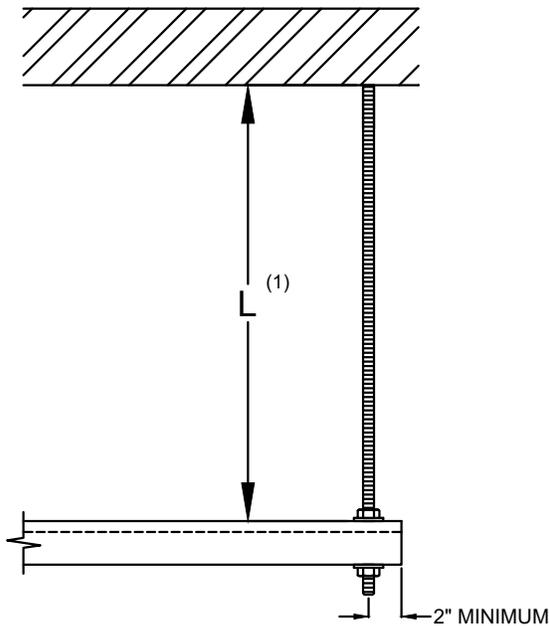


| ROD SIZE | L ⁽¹⁾ |
|----------|------------------|
| 1/4 | 12" |
| 3/8 | 19" |
| 1/2 | 25" |
| 5/8 | 31" |
| 3/4 | 37" |
| 7/8 | 43" |

NOTES:

- 1) MINIMUM (2) ROD STIFFENER CLIPS PER ROD.
- 2) MINIMUM TORQUE VALUE FOR RSC-1 BOLT IS 20 FOOT-POUNDS
- 3) ROD STIFFENER REQUIREMENTS APPLY ONLY TO THREADED RODS THAT HAVE SEISMIC CABLES ATTACHED.
- 4) B.O.= BY OTHERS, NOT BY THE VMC GROUP

(1)L = MAXIMUM ALLOWABLE THREADED ROD LENGTH WITHOUT STIFFENER

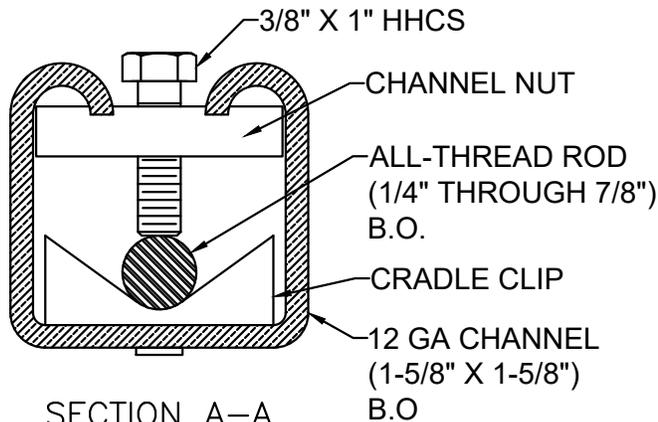

SECTION A-A
STANDARD
RSC-1 STIFFENER

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RSC-1 ROD STIFFENERS





VMC GROUP
 THE POWER OF TOGETHER
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :
 NONE
 SHEET:
 1 OF 3



DRAWING NO.: _____ REVISION _____

| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |

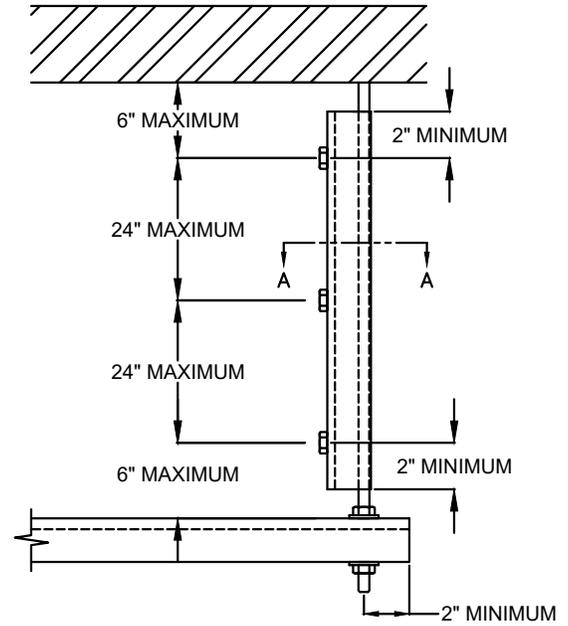
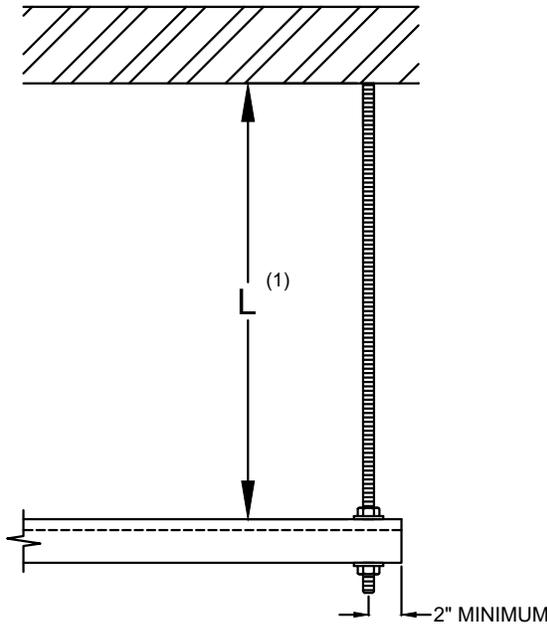


| ROD SIZE | L ⁽¹⁾ |
|----------|------------------|
| 1/4 | 12" |
| 3/8 | 19" |
| 1/2 | 25" |
| 5/8 | 31" |
| 3/4 | 37" |
| 7/8 | 43" |

NOTES:

- 1) MINIMUM (2) ROD STIFFENER CLIPS PER ROD.
- 2) MINIMUM TORQUE VALUE FOR RSC-1 BOLT IS 20 FOOT-POUNDS
- 3) ROD STIFFENER REQUIREMENTS APPLY ONLY TO THREADED RODS THAT HAVE SEISMIC CABLES ATTACHED.
- 4) B.O.= BY OTHERS, NOT BY THE VMC GROUP

(1)L = MAXIMUM ALLOWABLE THREADED ROD LENGTH WITHOUT STIFFENER

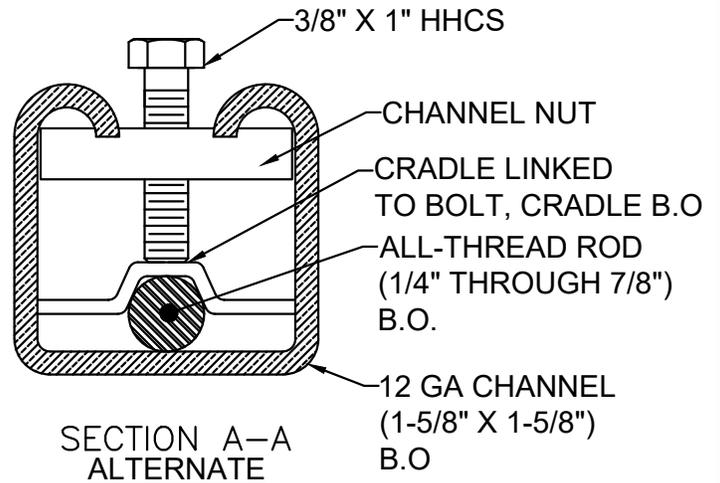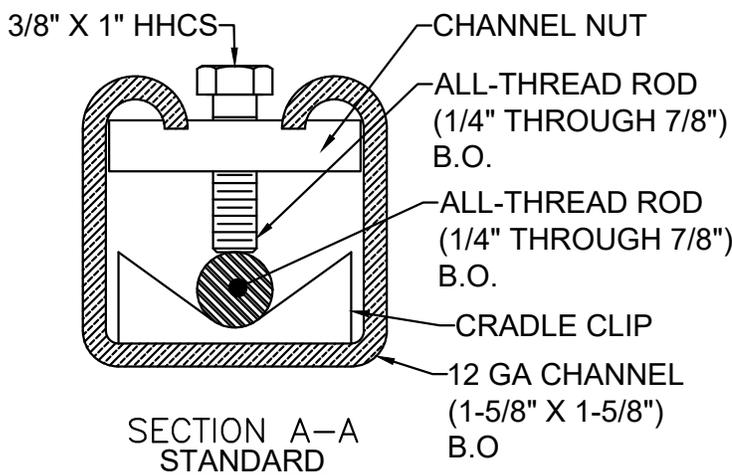

RSC-1 STIFFENER

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RSC-1 ROD STIFFENERS





VMC GROUP
 THE POWER OF TOGETHER
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE
 SHEET: 2 OF 3



DRAWING NO.: _____ REVISION _____

| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |

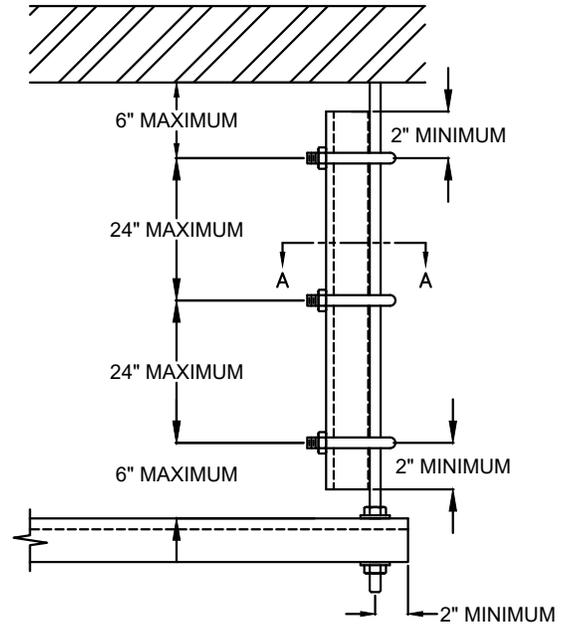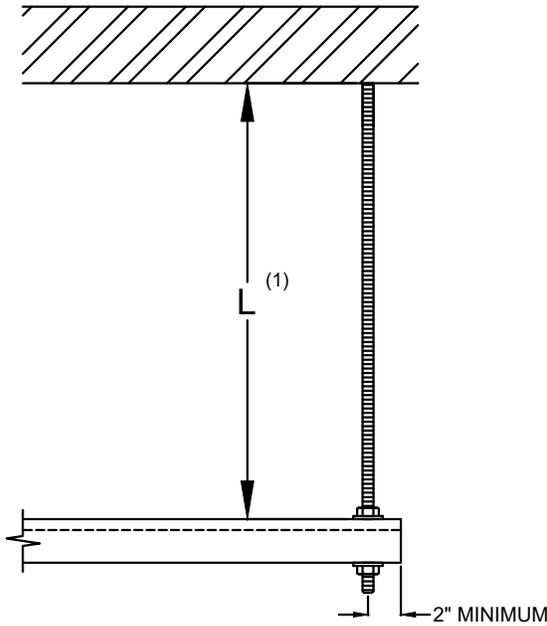


| ROD SIZE | L ⁽¹⁾ |
|----------|------------------|
| 1/4 | 12" |
| 3/8 | 19" |
| 1/2 | 25" |
| 5/8 | 31" |
| 3/4 | 37" |
| 7/8 | 43" |

NOTES:

- 1) MINIMUM (2) U BOLT STIFFENER PER ROD.
- 2) MINIMUM TORQUE VALUE FOR RSC-2 BOLT IS 20 FOOT-POUNDS
- 3) ROD STIFFENER REQUIREMENTS APPLY ONLY TO THREADED RODS THAT HAVE SEISMIC CABLES ATTACHED.
- 4) B.O.= BY OTHERS, NOT BY THE VMC GROUP

(1)L = MAXIMUM ALLOWABLE THREADED ROD LENGTH WITHOUT STIFFENER

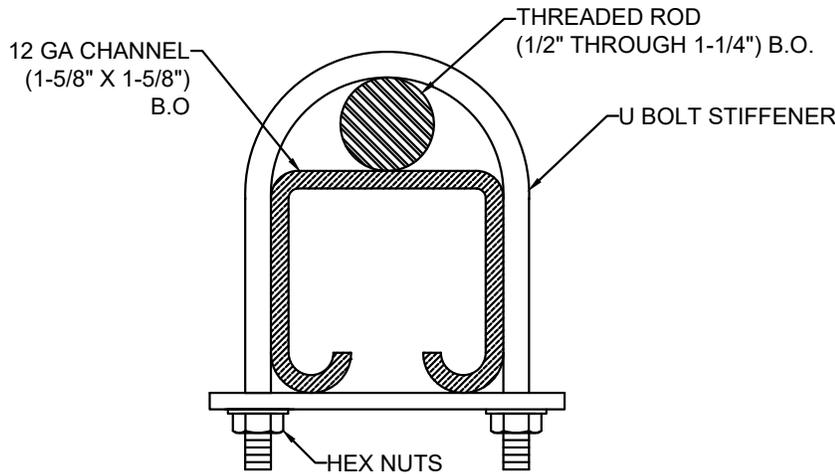

**SECTION A-A
RSC-2 STIFFENER**

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RSC-2 ROD STIFFENERS



VMC GROUP

THE POWER OF TOGETHER

Bloomington, NJ 07403
 Houston, TX 77041

SCALE :
 NONE
 SHEET:
 3 OF 3



DRAWING NO.: _____ REVISION