


REV.	DESCRIPTION	DATE	BY

KIT PART NUMBER	CABLE LENGTH (FT.)	CABLE COLOR	MAX. TENSION ALLOWABLE (LBS.)	KIT TYPE
SB-125-LRC-413	13	ORANGE	1100	9/16" SLOT / 1/2" STAKE EYE
SB-125-LRC-410	10	ORANGE	1100	9/16" SLOT / 1/2" STAKE EYE
SB-125-LRC-407	7	ORANGE	1100	9/16" SLOT / 1/2" STAKE EYE

- A. RATING AT 45° FOR STEEL ATTACHMENT (LRFD)
- B. RATING AT 45° FOR CONCRETE ATTACHMENT- 1/2" HILTI TZ @2-1/2" EMBEDMENT, 4" SLAB MIN

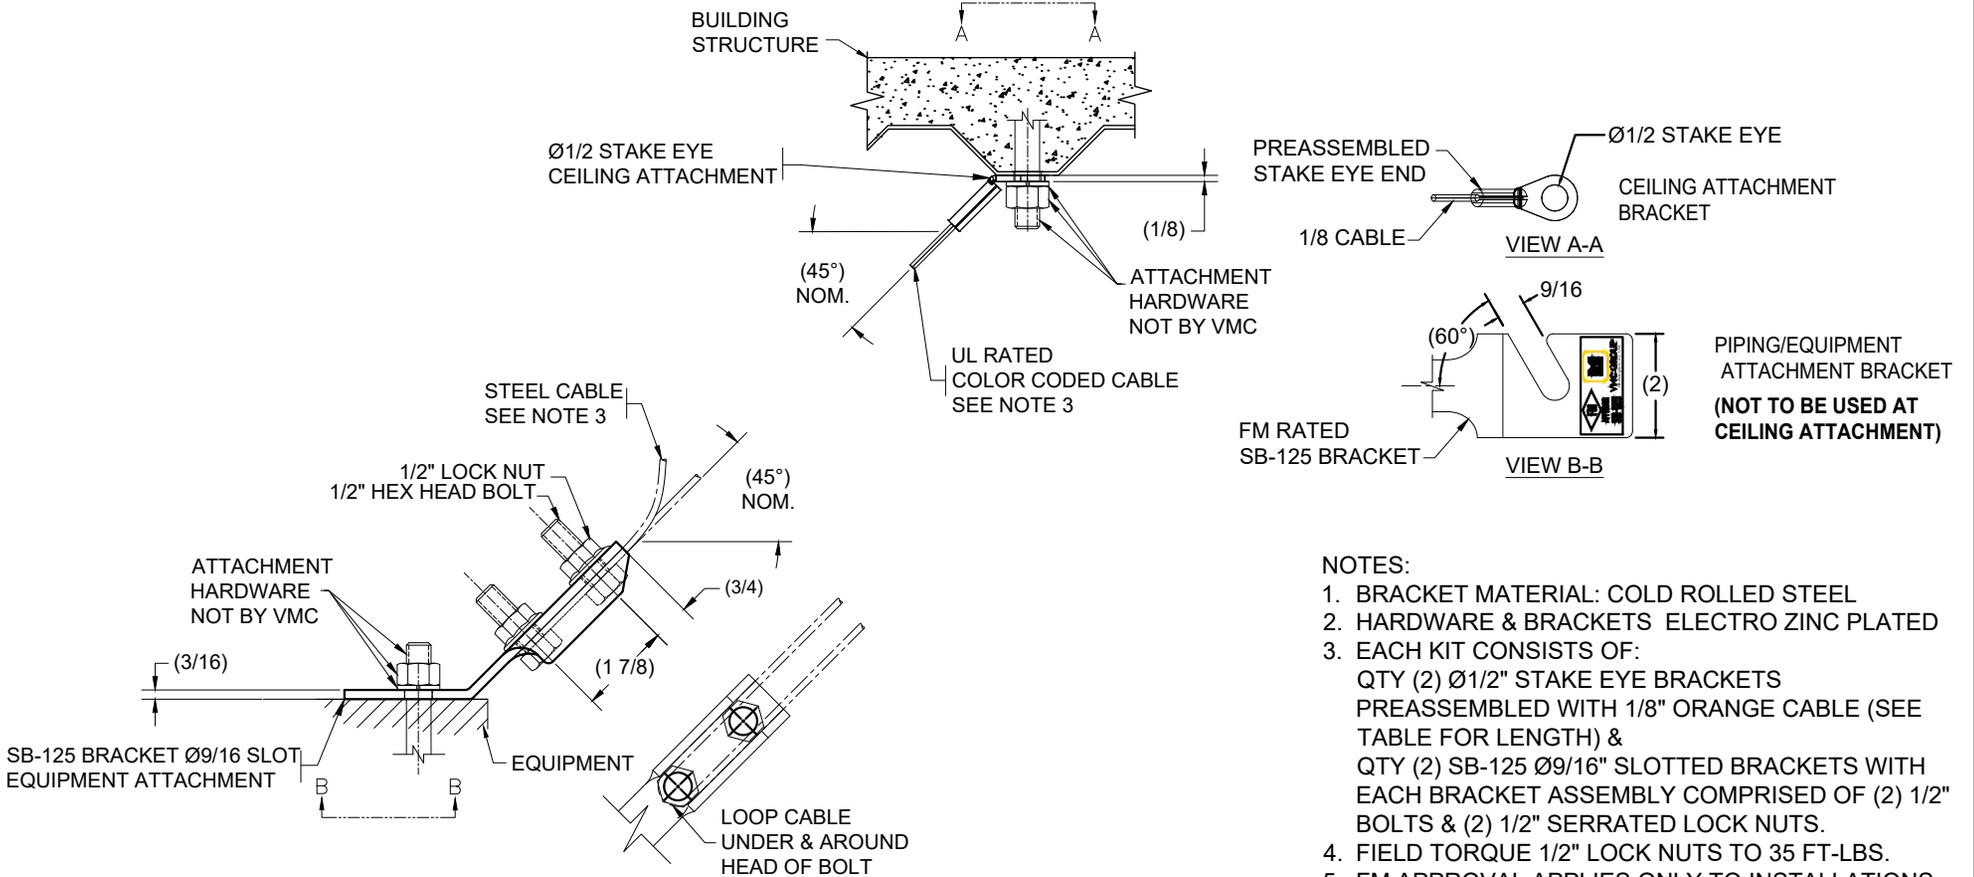

- NOTES:**
1. BRACKET MATERIAL: COLD ROLLED STEEL
  2. HARDWARE & BRACKETS ELECTRO ZINC PLATED
  3. EACH KIT CONSISTS OF:  
 QTY (2) Ø1/2" STAKE EYE BRACKETS PREASSEMBLED WITH 1/8" ORANGE CABLE (SEE TABLE FOR LENGTH) &  
 QTY (2) SB-125 Ø9/16" SLOTTED BRACKETS WITH EACH BRACKET ASSEMBLY COMPRISED OF (2) 1/2" BOLTS & (2) 1/2" SERRATED LOCK NUTS.
  4. FIELD TORQUE 1/2" LOCK NUTS TO 35 FT-LBS.
  5. FM APPROVAL APPLIES ONLY TO INSTALLATIONS USING STRUT.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

**MODEL SB-125-LRC 1100 LBS.  
1/8 INCH ORANGE SEISMIC CABLE  
RESTRAINT KIT**



SCALE:	NONE	
SHEET:	1 OF 1	
DRAWING NO.:		REVISION