
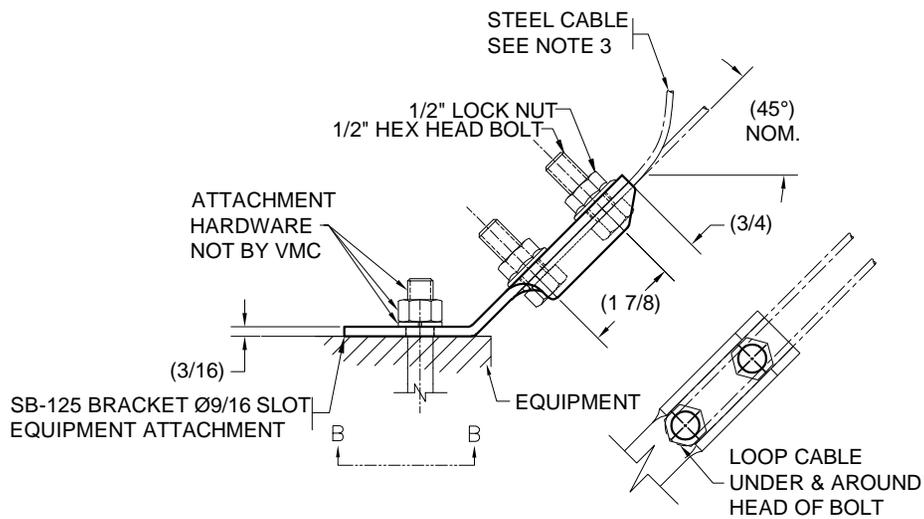
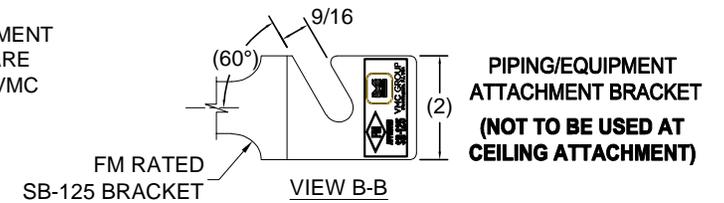
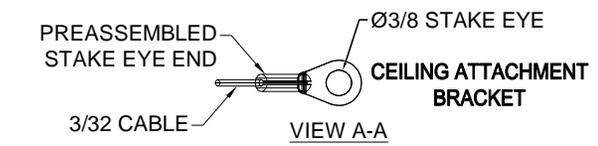


| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |

| KIT PART NUMBER | CABLE LENGTH (FT.) | CABLE COLOR | MAX. TENSION ALLOWABLE (LBS.) | KIT TYPE |
|-----------------|--------------------|-------------|-------------------------------|-----------------------------|
| SB-125-LRC-310 | 10 | GOLD | 600 | 9/16" SLOT / 3/8" STAKE EYE |
| SB-125-LRC-307 | 7 | GOLD | 600 | 9/16" SLOT / 3/8" STAKE EYE |

A. RATING AT 45° FOR STEEL ATTACHMENT (LRFD)
 B. RATING AT 45° FOR CONCRETE ATTACHMENT- 3/8" HILTI TZ @2-1/2" EMBEDMENT, 4" SLAB MIN

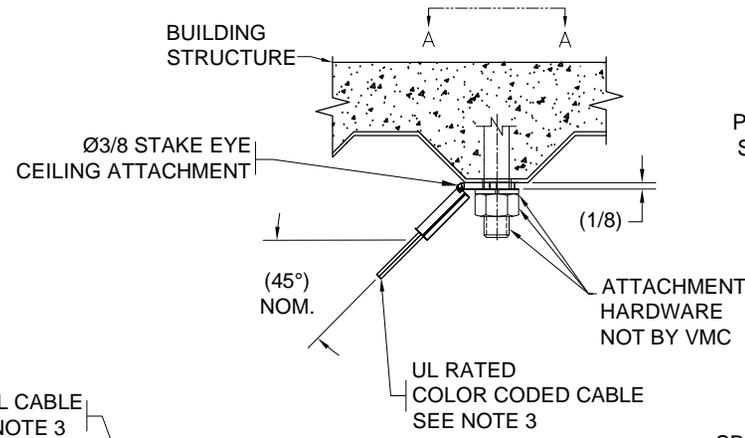

NOTES:

- BRACKET MATERIAL: COLD ROLLED STEEL
- HARDWARE & BRACKETS ELECTRO ZINC PLATED
- EACH KIT CONSISTS OF:
 QTY (2) Ø3/8" STAKE EYE BRACKETS PREASSEMBLED WITH 3/32" GOLD CABLE (SEE TABLE FOR LENGTH) &
 QTY (2) SB-125 Ø9/16" SLOTTED BRACKETS WITH EACH BRACKET ASSEMBLY COMPRISED OF (2) 1/2" BOLTS & (2) 1/2" SERRATED LOCK NUTS.
- FIELD TORQUE 1/2" LOCK NUTS TO 35 FT-LBS.
- FM APPROVAL APPLIES ONLY TO INSTALLATIONS USING STRUT.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL SB-125-LRC 600 LBS.
 3/32 INCH GOLD SEISMIC CABLE
 RESTRAINT KIT**



| | | |
|--------------|------|-------------------------|
| SCALE: | NONE | Member VISCMA |
| SHEET: | | |
| DRAWING NO.: | | REVISION |