



REV. DESCRIPTION DATE BY

| PART NUMBER | ISOLATOR MODEL | MAX. STEADY (LBS) | MAX. IMPACT (LBS) | ISOLATOR CONSTANT (LBS) | COLOR CODE |
|----------------|-------------------|-------------------------|-------------------------|-------------------------------|---------------|
| 607357-1 | SOT-7542 | 80,000 | 60,000 | 122,000 | PINK |

- 1. ALL DIMENSIONS ARE INCHES INTERRUPT PER ANSYLY 14.
- 2. TAPPED HOLES IN ISOLATOR TOP PLATE CAN BE PROVIDED TO SUIT
- 3. STANDARD FINISH: CONTACT VMC FOR ADDITIONAL AVAILABILITY.
 - A.STEEL WELDMENTS: STANDARD VMC COLOR
 - B. SPRING: POWDER COATED
 - C. HARDWARE: ELECTRO- ZINC PLATED
- 4. AN APPROVED LOAD DISTRUBUTION PLATE IS REQUIRED IF THE THE EQUIPMENT BASE IS NARROWER THAN 15".
- 5. ESITMATED NET WEIGHT: 500 LBS.

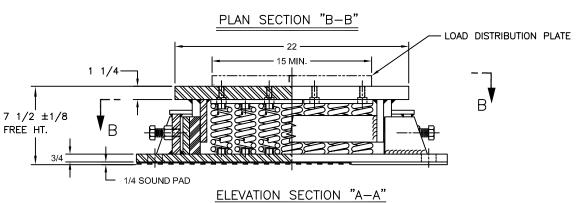



OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

| CER | TIF | ED | FOR |
|-----|-----|----|------------|
|-----|-----|----|------------|

CUSTOMER P.O.:

JOB NAME: CUSTOMER:

SALES ORDER:

MODEL SOT 80,000 LBS. **SPRING ISOLATORS** WITH ADJUSTABLE SNUBBER

| THE VMC GROUP |
|-----------------------|
| The Power of Together |

Bloomingdale, NJ 07403 Houston, TX 77041

SCALE SHEET

NONE

DRAWING NO.

REVISION