


REV.	DESCRIPTION	DATE	BY

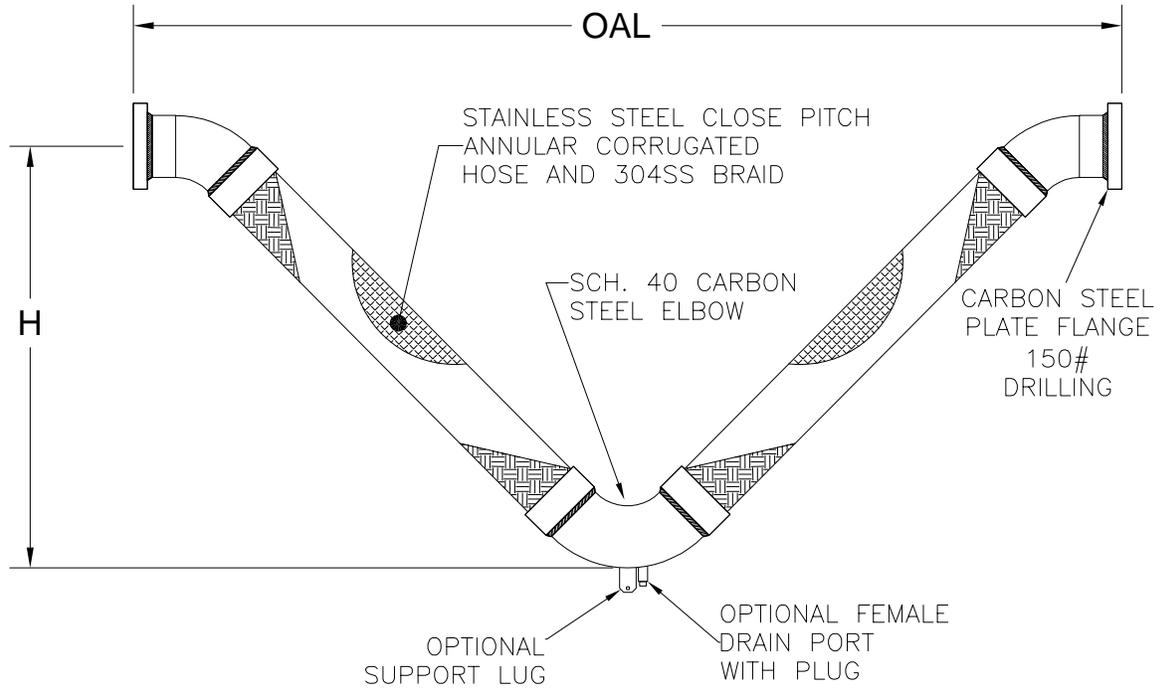

MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
SS-SM-FP-2X3	2"	36"	16 1/4"	370	555	3"	20
SS-SM-FP-2.5X3	2 1/2"	35 3/4"	15 3/4"	390	585	3"	28
SS-SM-FP-3X3	3"	39 1/2"	17 1/4"	250	375	3"	36
SS-SM-FP-4X3	4"	46 1/4"	20"	210	315	3"	54
SS-SM-FP-5X3	5"	56 3/4"	24 1/2"	167	251	3"	75
SS-SM-FP-6X3	6"	61"	26"	165	248	3"	115
SS-SM-FP-8X3	8"	77 3/4"	32 3/4"	220	330	3"	226
SS-SM-FP-10X3	10"	88 3/4"	36 3/4"	175	263	3"	370
SS-SM-FP-12X3	*12"	101"	41 1/2"	160	240	3"	525

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL SS-SM-FP
 3 INCH MOVEMENT
 SEISMIC METAL
 FLEXIBLE CONNECTOR
 FLANGED ENDS**



SCALE:	NONE	
SHEET:	1 OF 1	
DRAWING NO.:		REVISION