


REV.	DESCRIPTION	DATE	BY

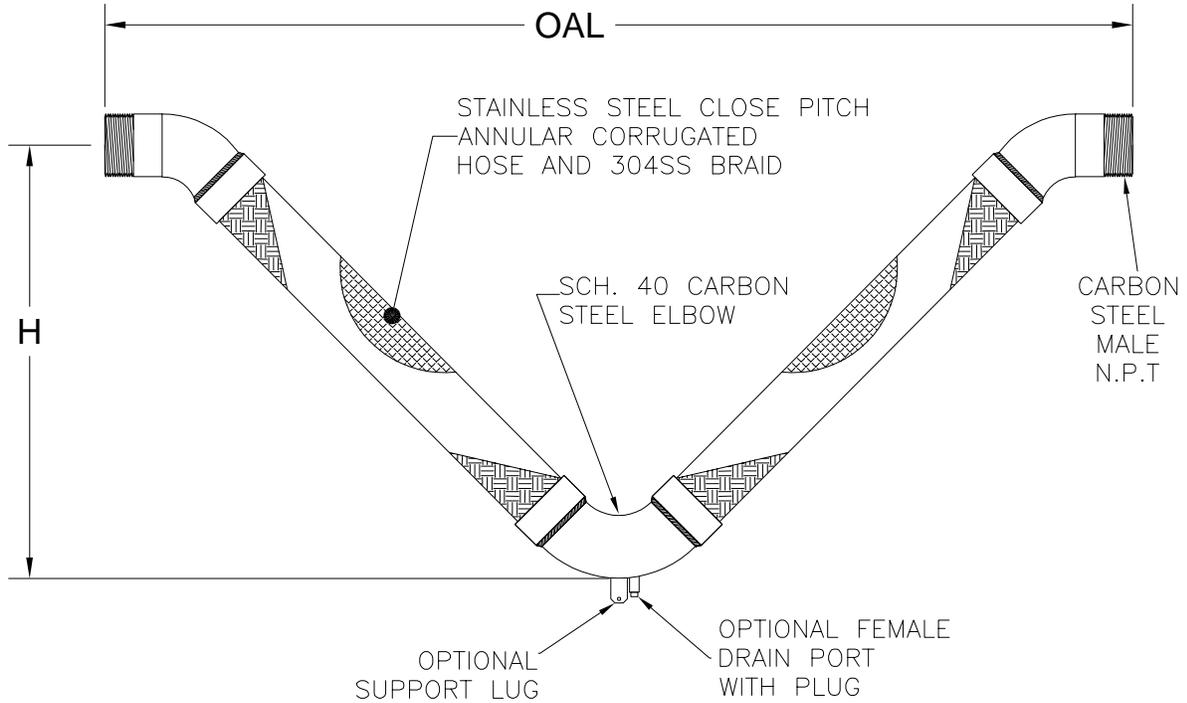

MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
SS-SM-PM-0.5X3	1/2"	25 1/2"	8 3/4"	796	1194	3"	2
SS-SM-PM-0.75X3	3/4"	27"	10 1/4"	597	895	3"	3
SS-SM-PM-1X3	1"	30 1/4"	11 1/4"	455	682	3"	5
SS-SM-PM-1.2X3	1 1/4"	33 3/4"	12 3/4"	441	661	3"	7
SS-SM-PM-1.5X3	1 1/2"	37"	14 1/4"	370	555	3"	9
SS-SM-PM-2X3	2"	41 1/2"	16 1/4"	370	555	3"	15
SS-SM-PM-2.5X3	2 1/2"	41 1/4"	15 3/4"	390	585	3"	25
SS-SM-PM-3X3	3"	45"	17 1/4"	250	375	3"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL SS-SM-PM
 3 INCH MOVEMENT
 SEISMIC METAL
 FLEXIBLE CONNECTOR
 THREADED ENDS**

VMC GROUP
 THE POWER OF TOGETHER
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE	
SHEET:	
DRAWING NO.:	REVISION