




REV.	DESCRIPTION	DATE	BY

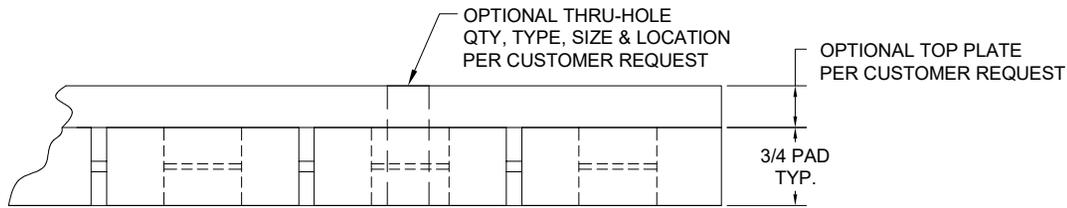

COLOR CODE	RECOMMENDED LOAD RATINGS PER 2" X 2" SEGMENT, (LBS.)
BLUE	120
BLACK (STANDARD)	180
RED	240
GREEN	360

**PAD & PLATE COMBINATION WITH ONE CTR. HOLE OPTION**

**LOAD VS. DEFLECTION PER 2 INCH SEGMENT**

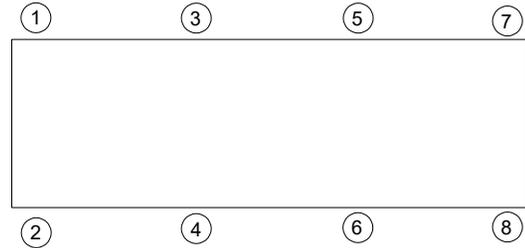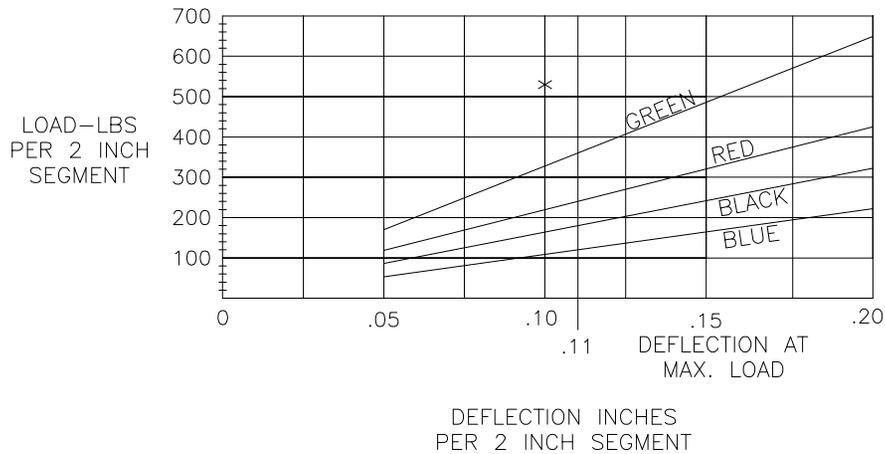

**ISOLATOR SELECTIONS**

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

NOTE:  
1. SPECIAL FLEX-PLATE SIZES, COMBINATIONS AND CAPACITIES AVAILABLE UPON REQUEST. CONTACT VMC FOR AVAILABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL SINGLE-LAYER MAXI-FLEX  
 PAD & PLATE 120-360 LBS.  
 ELASTOMERIC PAD**



SCALE:  
NONE

SHEET:  
1 OF 1

DRAWING NO.: \_\_\_\_\_ REVISION

