


REV.	DESCRIPTION	DATE	BY

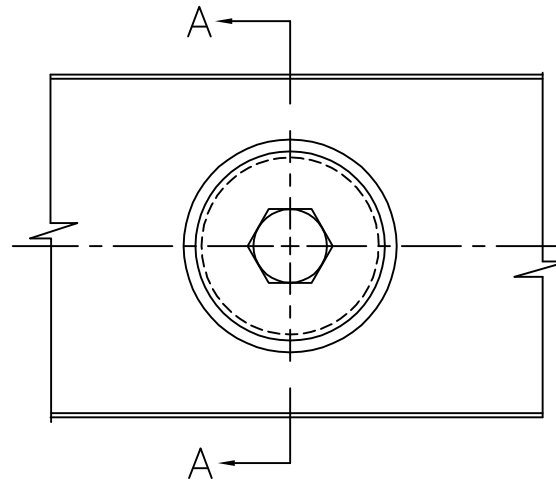

MODEL NUMBER	RATED AXIAL LOAD VS DEFLECTION	
	MAX. LOAD	DEFL.
TMRB2-150	150 lbs	.10 in
TMRB2-300	300 lbs	.10 in
TMRB2-500	500 lbs	.10 in

STEEL SNUBBING WASHER (BY VMC)

STEEL TRACK #24 GA (BY OTHERS)

NEOPRENE ELEMENTS

SAE FLAT WASHER
2 1/4ODX1 1/4 ID
X 9/64 THK (4X-2 TOP
AND 2 BOTTOM)

Ø1/2 BOLT (BY OTHERS)

7/8 1 5/32

SECTION A-A

NOTE:

1. ALL DIMENSIONS IN INCHES. INTERPRET PER
ANSI Y14.

SUBMITTAL DRAWING

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR
PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL TMRB2 150-500 LBS.
ELASTOMERIC WALL ISOLATOR
TRACK MOUNTED RING
AND BUSHING



THE VMC GROUP
The Power of Together
Bloomington, NJ 07403
Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION