
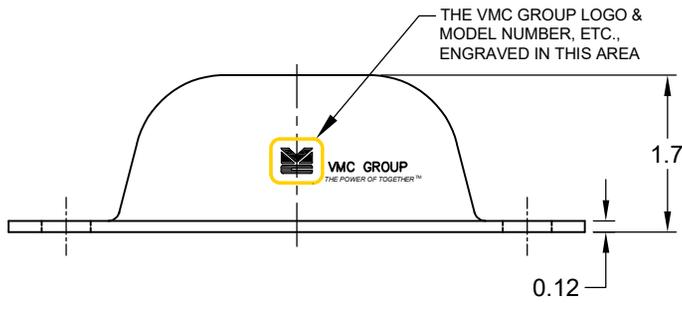



REV.	DESCRIPTION	DATE	BY

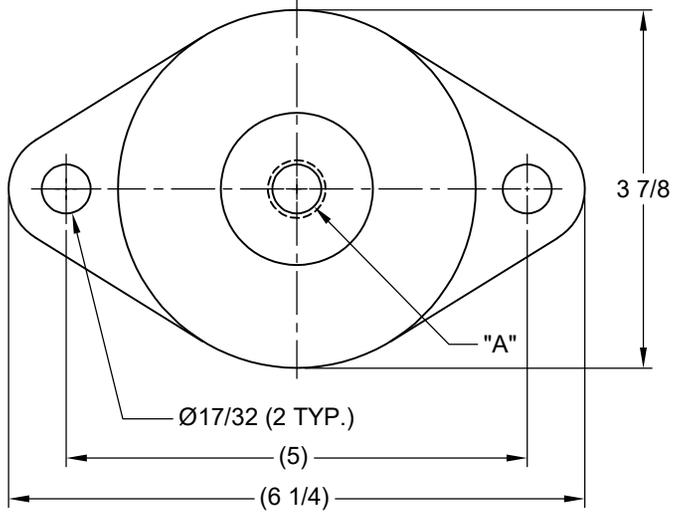

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14.
 2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 - ③ SPECIAL HOLE TYPE. CONTACT VMC GROUP FOR AVAILABILITY.
 - ⚠ COLOR-CODE "MARK" IS AN ACCEPTABLE ADDITION TO MODEL STAMPING. COLOR-CODE WILL DIFFER FOR EACH STYLE.
 5. MOLDED METAL AND ELASTOMER MOUNT, DESIGNED FOR "FAIL-SAFE", "CAPTIVE", "MOBILE", OR "SEISMIC" APPLICATIONS. CONSULT VMC GROUP FOR SPECIFIC APPLICABILITY AND LIMITS.

ELASTOMERIC				
PART NUMBER	MODEL DESIGNATION	MAX. COMPRESSION (LBS/KG)	COLOR CODE	SHORE A DURO ± 3
770077-[-**]-01	TTB-[-**]-500	500 (227)	YELLOW	30
TTB-M12-500	TTB-M12-500	500 (227)	YELLOW/RED	40
TTB-M12-1000	TTB-M12-1000	1000 (454)	WHITE/RED	60
770077-[-**]-02	TTB-[-**]-750	750 (340)	WHITE	50
770077-[-**]-03	TTB-[-**]-1000	1000 (454)	RED	60
770077-[-**]-04	TTB-[-**]-1250	1250 (567)	GREEN	70
770077-[-**]-05	TTB-[-**]-1500	1500 (681)	PURPLE	80


** = SUFFIX DESIGNATION ON TABLE II

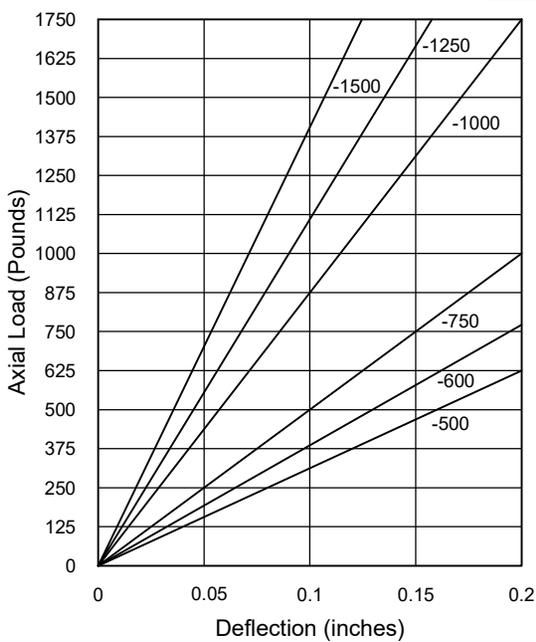

Axial Load Vs. Deflection

TABLE II

SUFFIX DESIGNATION	DIMENSION "A"
10	5/8-11UNC-2B
12	3/4-10UNC-2B
M16	M16 X 2-5H
M12	M12 X 1.75-5H
53	Ø .53

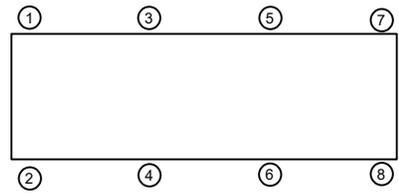

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQPT. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET. OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL TTB 500-1500 LBS.
CAPTIVE ELASTOMERIC ISOLATOR



SCALE: NONE

SHEET: 1 OF 1

DRAWING NO.: _____

REVISION: _____