

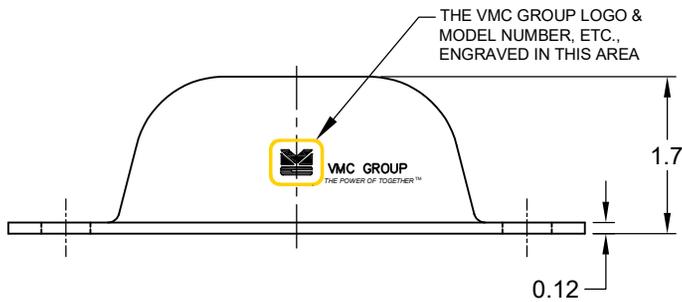


REV.	DESCRIPTION	DATE	BY

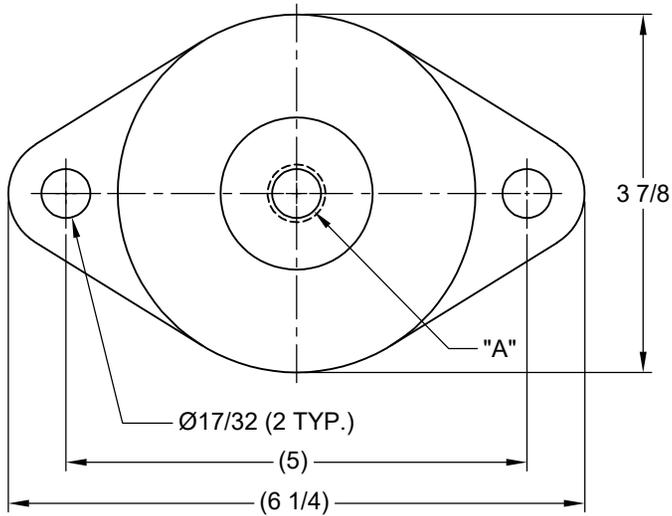

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14.
  2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
  3. SPECIAL HOLE TYPE. CONTACT VMC GROUP FOR AVAILABILITY.
  4. COLOR-CODE "MARK" IS AN ACCEPTABLE ADDITION TO MODEL STAMPING.
  5. MOLDED METAL AND ELASTOMER MOUNT, DESIGNED FOR "FAIL-SAFE", "CAPTIVE", "MOBILE", OR "SEISMIC" APPLICATIONS. CONSULT VMC GROUP FOR SPECIFIC APPLICABILITY AND LIMITS.

NEOPRENE				
PART NUMBER	MODEL DESIGNATION	MAX. COMPRESSION (LBS/KG)	COLOR CODE	SHORE A DURO ± 3
770077-[-]**-01	TTB-[-]**-500	500 (227)	YELLOW	30
TTB-M12-500	TTB-M12-500	500 (227)	YELLOW/RED	40
770077-[-]**-02	TTB-[-]**-750	750 (340)	WHITE	50
770077-[-]**-03	TTB-[-]**-1000	1000 (454)	RED	60
770077-[-]**-04	TTB-[-]**-1250	1250 (567)	GREEN	70
770077-[-]**-05	TTB-[-]**-1500	1500 (681)	PURPLE	80

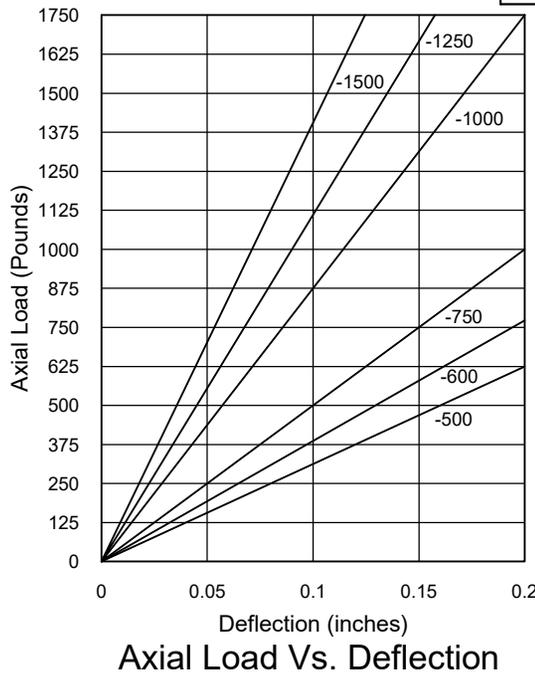

\*\* = SUFFIX DESIGNATION ON TABLE II

TABLE II

SUFFIX DESIGNATION	DIMENSION "A"
10	5/8-11UNC-2B
12	3/4-10UNC-2B
M16	M16 X 2-5H
M12	M12 X 1.75-5H
53	Ø .53



ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQPT. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

**MODEL TTB 500-1500 LBS.  
CAPTIVE ELASTOMERIC ISOLATOR**

Bloomington, NJ 07403  
Houston, TX 77041

SCALE: NONE

SHEET: \_\_\_\_\_

DRAWING NO.: \_\_\_\_\_

REVISION: \_\_\_\_\_